


1 2 3 4 5 6 7 8

A
B
C
D
E

A
B
C
D
E

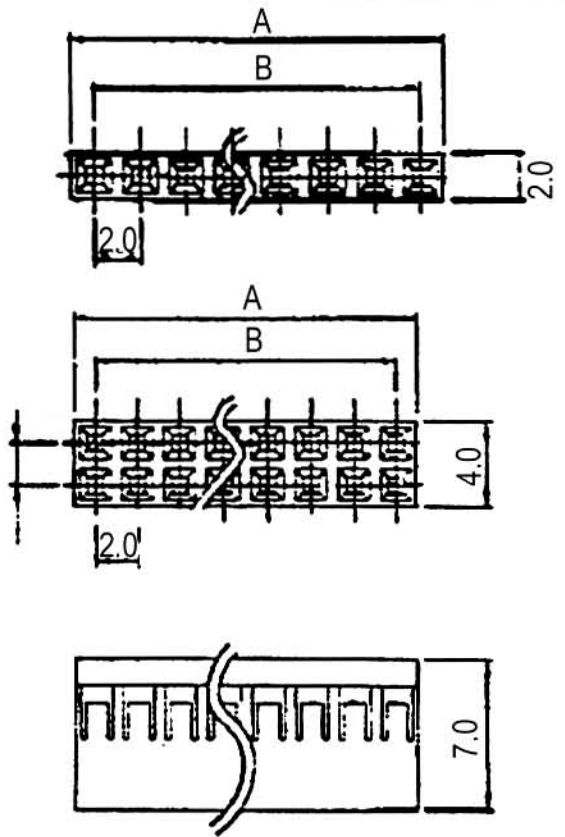

Circuits		Dimension(mm)		Circuits		Dimension(mm)	
Single Row	Dual Row	A	B	Single Row	Dual Row	A	B
2	4	4.20	2.00	21	42	42.20	40.00
3	6	6.20	4.00	22	44	44.20	42.00
4	8	8.20	6.00	23	46	46.20	44.00
5	10	10.20	8.00	24	48	48.20	46.00
6	12	12.20	10.00	25	50	50.20	48.00
7	14	14.20	12.00	26	52	52.20	50.00
8	16	16.20	14.00	27	54	54.20	52.00
9	18	18.20	16.00	28	56	56.20	54.00
10	20	20.20	18.00	29	58	58.20	56.00
11	22	22.20	20.00	30	60	60.20	58.00
12	24	24.20	22.00	31	62	62.20	60.00
13	26	26.20	24.00	32	64	64.20	62.00
14	28	28.20	26.00	33	66	66.20	64.00
15	30	30.20	28.00	34	68	68.20	66.00
16	32	32.20	30.00	35	70	70.20	68.00
17	34	34.20	32.00	36	72	72.20	70.00
18	36	36.20	34.00	37	74	74.20	72.00
19	38	38.20	36.00	38	76	76.20	74.00
20	40	40.20	38.00	39	78	78.20	76.00
				40	80	80.20	78.00

ORDER INFORMATION

H1000 — Contact No. Contact Type Row Type Insulator Color

02-40(Single Row) P: Non Distribution S: Single Row B: Black FRI It With '0'
 04-80(Dual Row) D: Dual Row

G
H

G
H

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE		PART NAME	
MM		3:1		HRS 2.0mm HOUSING	
APPD.	CKD.	TOLERANCE	PART NO.	REV.	
		± 0.3	H1000-XXPXB000	A	

制表日: 2002/12/04

DRAWING. *Jane* APPROVED

1 2 3 4 5 6 7 8