

### Specifications


#### Electrical

Current Rating: 2Amp  
 Voltage Rating : 100V AC/DC  
 Contact Resistance: 20m Ω max.  
 Insulation Resistance: 1000MΩ min.  
 Withstand Voltage: 800VAC /minute  
 Temperature Range: -25° c to +85° c  
 Material: Nylon 66, UL94V-0

| CIRCUIT | DIMENSION |       |
|---------|-----------|-------|
|         | A         | B     |
| 2       | 2.00      | 4.80  |
| 3       | 4.00      | 6.80  |
| 4       | 6.00      | 8.80  |
| 5       | 8.00      | 10.80 |
| 6       | 10.00     | 12.80 |
| 7       | 12.00     | 14.80 |
| 8       | 14.00     | 16.80 |
| 9       | 16.00     | 18.80 |
| 10      | 18.00     | 20.80 |
| 11      | 20.00     | 22.80 |
| 12      | 22.00     | 24.80 |
| 13      | 24.00     | 26.80 |
| 14      | 26.00     | 28.80 |
| 15      | 28.00     | 30.80 |



4-15P                      3P                      2P

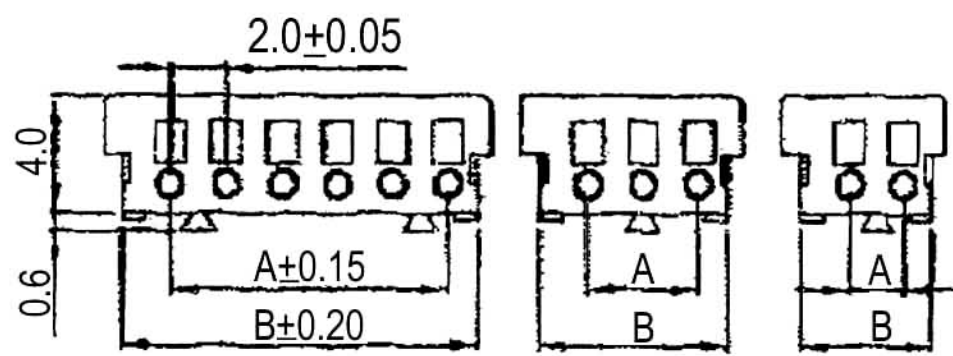

**玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

|                 |             |          |       |      |           |                |      |
|-----------------|-------------|----------|-------|------|-----------|----------------|------|
| 制表日: 2002/12/04 | DRAWING.    | APPROVED | APPD. | CKD. | TOLERANCE | PART NO.       | REV. |
|                 | <i>Jane</i> |          |       |      | ± 0.5     | H2009-XXPW0000 | A    |