
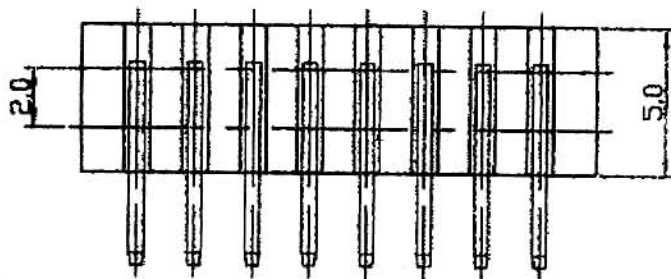



0.5 Square Pin

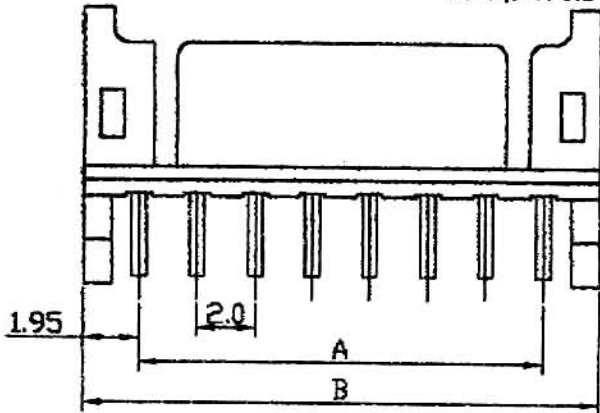

SPECIFICATIONS


Electrical

Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Operating Temp.: -25°C ~ +85°C
 Contact Resistance: 20mΩ/Max.
 Insulation Resistance: 1000MΩ/Min.

Material

Terminal Material: Brass/ Tin-plated/ Gold-plated
 Material: Nylon 66, UL 94V-0

Poles	Dimension mm (in.)		Note.
	A	B	
6	4.0(0.157)	7.9(0.311)	
8	6.0(0.236)	9.9(0.390)	
10	8.0(0.315)	11.9(0.469)	
12	10.0(0.394)	13.9(0.547)	
14	12.0(0.472)	15.9(0.626)	
16	14.0(0.551)	17.9(0.705)	
18	16.0(0.630)	19.9(0.783)	
20	18.0(0.709)	21.9(0.862)	
22	20.0(0.787)	23.9(0.941)	
24	22.0(0.866)	25.9(1.020)	
26	24.0(0.945)	27.9(1.098)	
28	26.0(1.024)	29.9(1.177)	
30	28.0(1.102)	31.9(1.256)	
32	30.0(1.181)	33.9(1.335)	

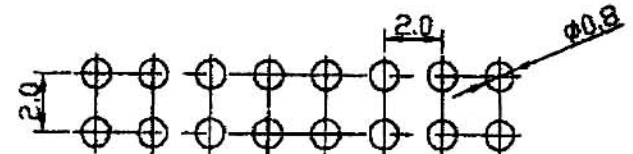

RECOMMENDED P.C. BOARD HOLE DIMM.

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

2:1

2.0mm Wafer Right Angle
 Dual Row / White Insulator

制表日: 2002/12/04

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Jane

± 0.5

W2103-XXPDRXXW

A