
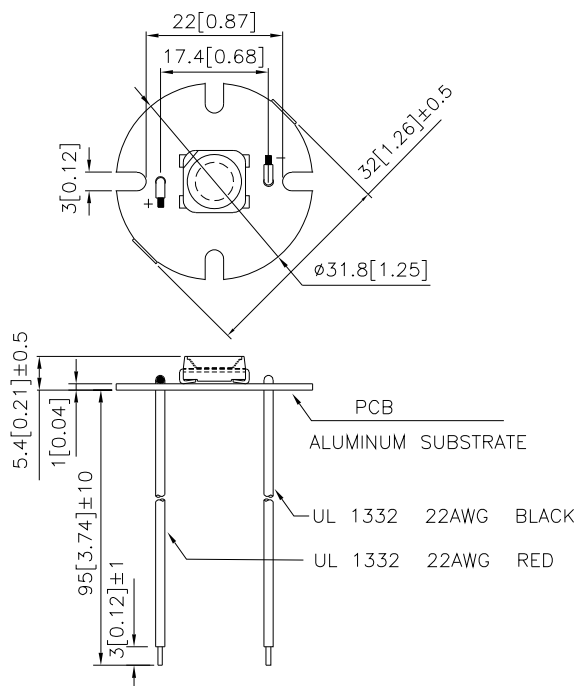


PRELIMINARY SPEC

Part Number : LT-001-03 SUPER BRIGHT YELLOW

Features

- *RELEASING HEAT WITH ALUMINUM SUBSTRATE.
- *SINGLE COLOR.
- *HIGH LUMINANCE.
- *THE LED PART NO : KA-1010SYC28.
- *RoHS COMPLIANT.

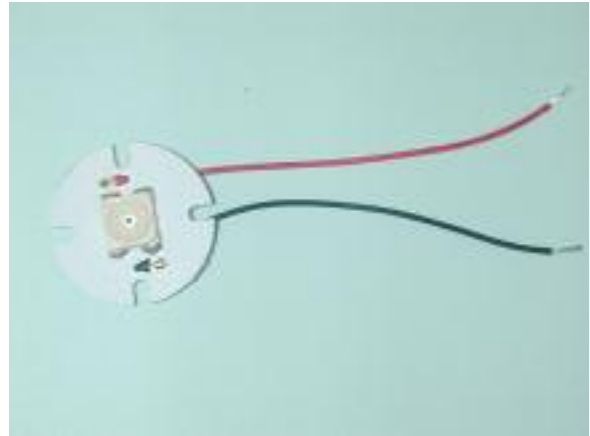

Applications

- *Display backlighting where high brightness is required.
- *substitution of micro incandescent lamps.
- *portable light source(e.g. bicycle flashlight).
- *signal and symbol luminaire for orientation.
- *marker lights(e.g. steps, exit ways, etc).
- *decorative and entertainment lighting.
- *indoor and outdoor commercial and residential architectural lighting.

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
3. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	luminous Intensity Iv(cd) @350mA		Viewing Angle[1]
		Min.	Typ.	2θ1/2
LT-001-03	SUPER BRIGHT YELLOW (InGaAlP)	5.7	9	120°

Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Value	Unit
Power dissipation	Pt	1.3	W
Reverse Voltage	VR	5	V
Junction temperature	TJ	110	°C
Operating Temperature	Top	-40 To +85	°C
Storage Temperature	Tstg	-40 To +85	°C
DC Forward Current	IF	400	mA
Peak Forward Current [2]	IFM	700	mA
Thermal resistance	Rth	50	°C/W

Notes:







1.θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

2.1/10 Duty Cycle, 0.1ms Pulse Width.

Electrical / Optical Characteristics at TA=25°C


Parameter	Symbol	Value	Unit
Wavelength at peak emission IF=350mA [Typ.]	λpeak	590	nm
Dominant Wavelength IF=350mA [Typ.]	λdom	588	nm
Spectral bandwidth at 50%ΦREL MAX IF=350mA [Typ.]	Δλ	20	nm
Viewing angle at 50%ΦV [Typ.]	θ	120	°
Forward Voltage IF=350mA [Min.]	VF	2.0	V
Forward Voltage IF=350mA [Typ.]		2.5	
Forward Voltage IF=350mA [Max.]		3.0	
Reverse Current (VR=5V) [Typ.]	IR	10	μA
Temperature coefficient of λpeak IF=350mA, -10°C≤T≤100°C [Typ.]	TCλpeak	0.13	nm/°C
Temperature coefficient of λdom IF=350mA, -10°C≤T≤100°C [Typ.]	TCλdom	0.11	nm/°C
Temperature coefficient of VF IF=350mA, -10°C≤T≤100°C [Typ.]	TCV	-2.9	mV/°C

LT-001-03

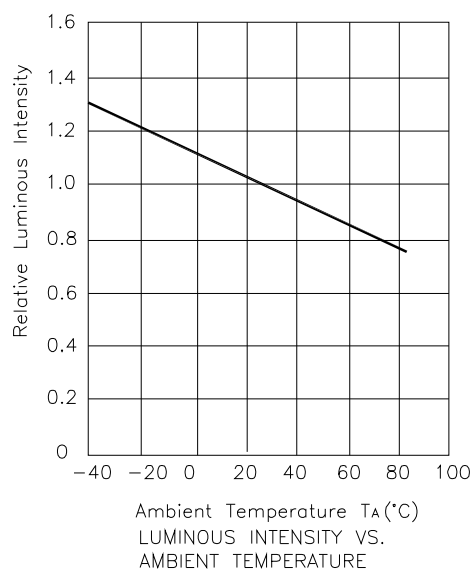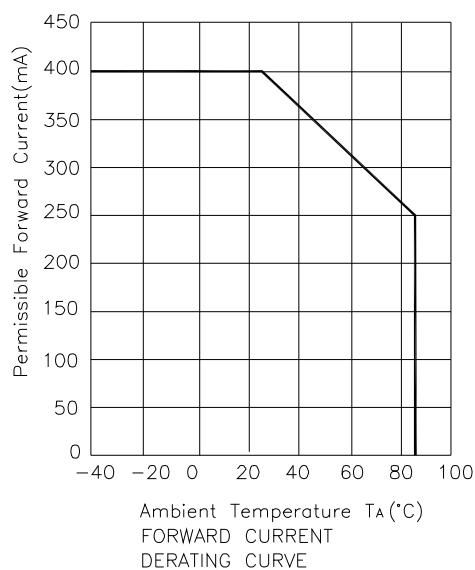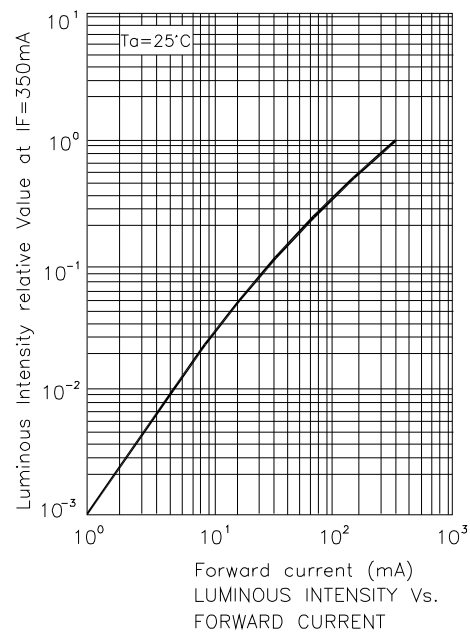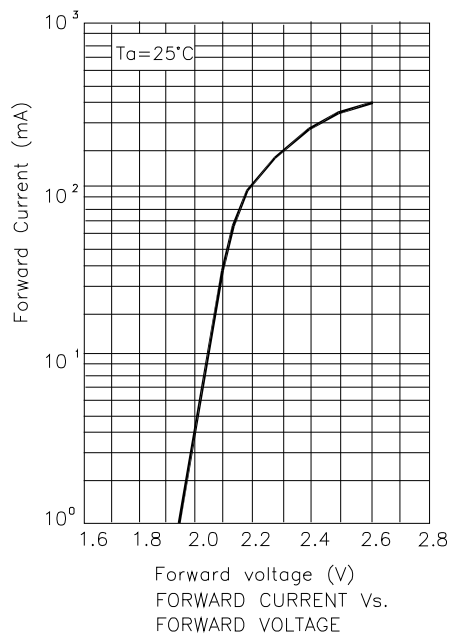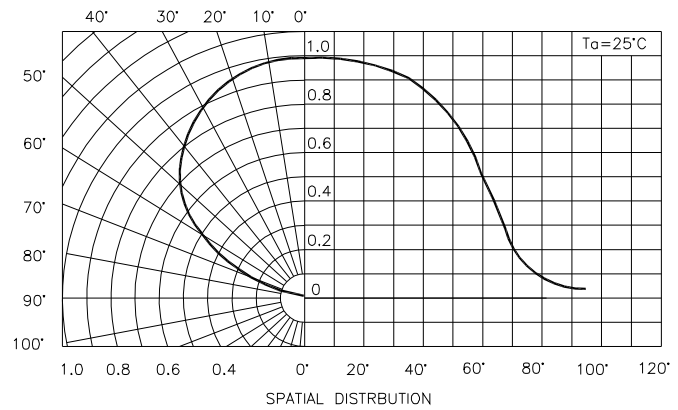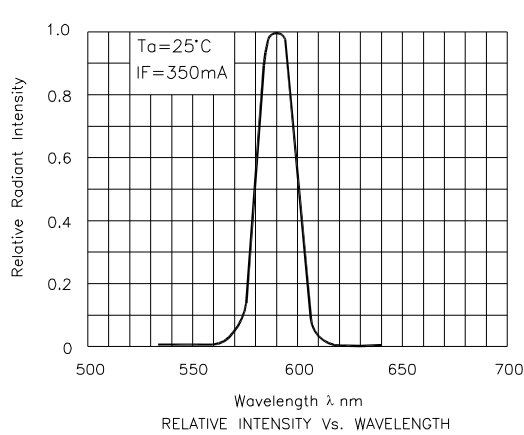

PACKING & LABEL SPECIFICATIONS

LT-001-03

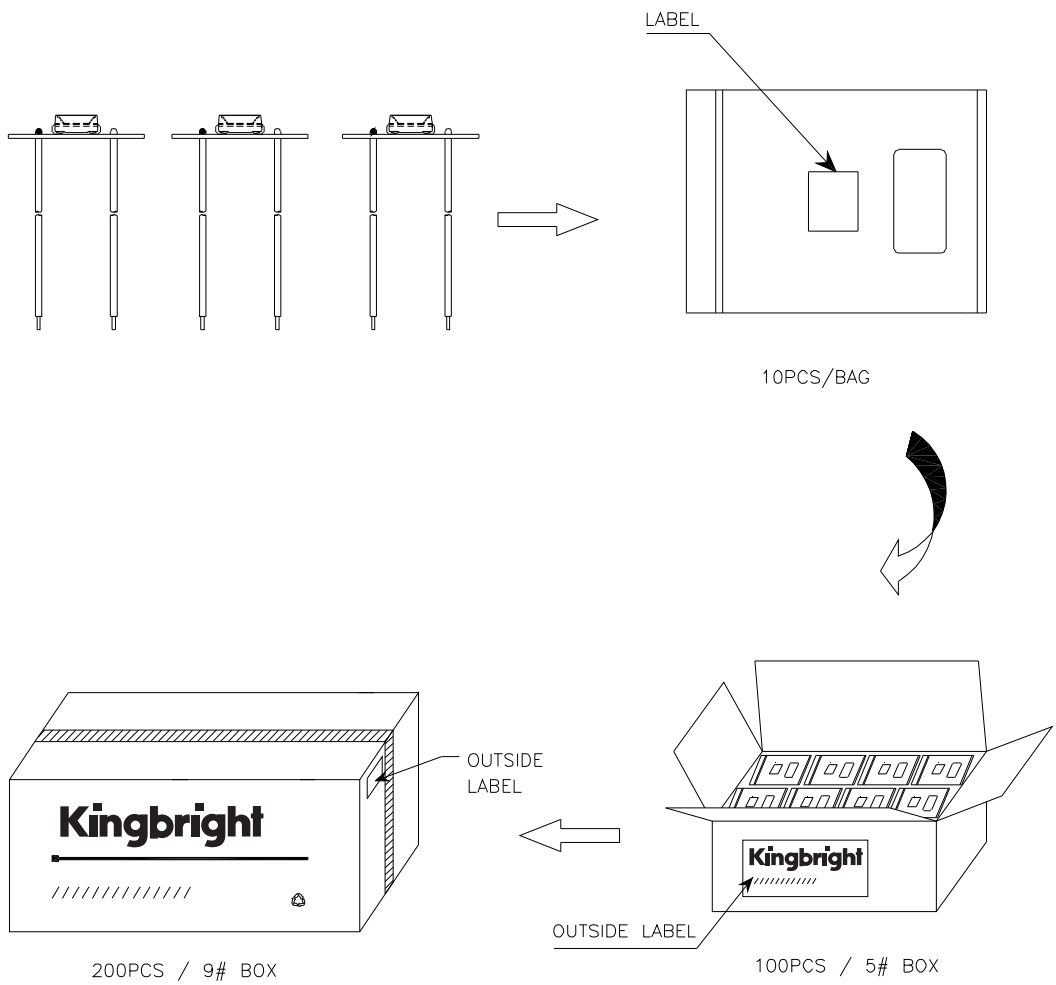

Kingbright	
Q.C.	
TYPE NO : LT-001XXX	QC xxx xx xxxx PASSED
QUANTITY : 10 pcs	Date
S/N : XXXX	CODE: XXX
LOT NO : 	
MADE IN CHINA	RoHS Compliant

Remarks:
If special sorting is required (e.g. binning based on forward voltage, luminous intensity/ luminous flux or wavelength), the typical accuracy of the sorting process is as follows:
1. Wavelength: +/-1nm
2. Luminous Intensity/ luminous flux: +/-15%
3. Forward Voltage: +/-0.1V
Note: Accuracy may depend on the sorting parameters