


Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage:
 750V AC (rms) for 1 Minute(Rev. 1.1)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

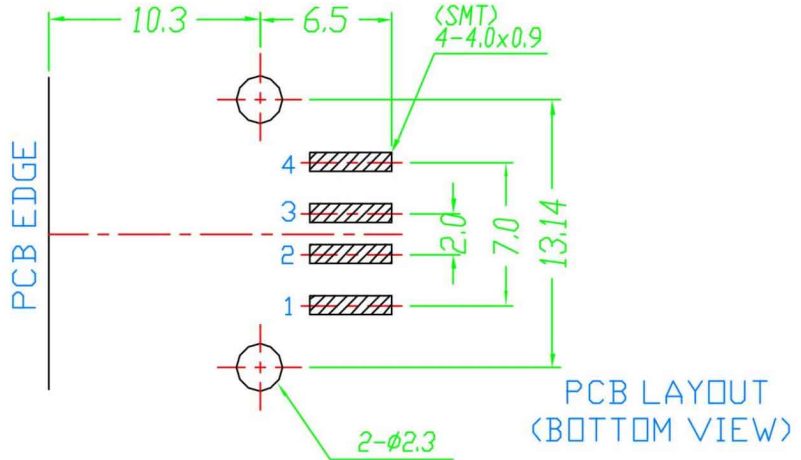

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	BLACK	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"; Ni:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni:80~120u"

RoHS
Compliant

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日
2010/09/17

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

TOLERANCE
 X. ±0.38
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

REV.
版次 B

PART NAME 品名
 USB A TYPE 4P FEMALE SMT TYPE
 NICKEL SHELL SELECTIVE GOLD PLATING
 BLACK COLOR ROHS

PART NO.
料號 C8317-04AFDSB0R