



### Features


- Shielded Construction
- Core Material: **Carbonyl powder**
- High Current, low DCR, high efficiency
- RoHS, Halogen Free and REACH compliance

### General Specifications

- Storage temp range: -55°C to +125°C
- Operating temp range: -55°C to +125°C
- Moisture Sensitivity Level(MSL): 1



### ▶ Shape and Dimensions (Unit:mm)

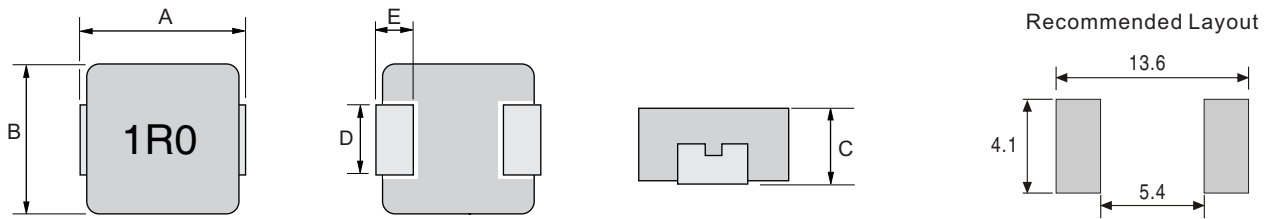


Type	A	B	C	D	E
HIP1030	11.0±0.5	10.0±0.3	2.8±0.2	3.0±0.5	2.0±0.5

### ▶ Electrical Characteristics For HIP1030 Series @ 25°C

Part Number	Inductance (μH) ±20%	DCR (mΩ) Max.	Isat (A) Typ.	Irms (A) Typ.
HIP1030-1R0M	1.0	6	20	15
HIP1030-3R3M	3.3	16	14	9
HIP1030-4R7M	4.7	22.5	13	7
HIP1030-100M	10	55	8	5


- Inductance tested at 100kHz, 1.0Vrms, 0.0A<sub>dc</sub>
- Heat Rating Current (I<sub>rms</sub>): Current that cause the temperature 40°C rise from 25°C
- Saturation Current (I<sub>sat</sub>): DC current at which the inductance drops 30% from its value without current

## ▶ Tape & Reel Specifications:

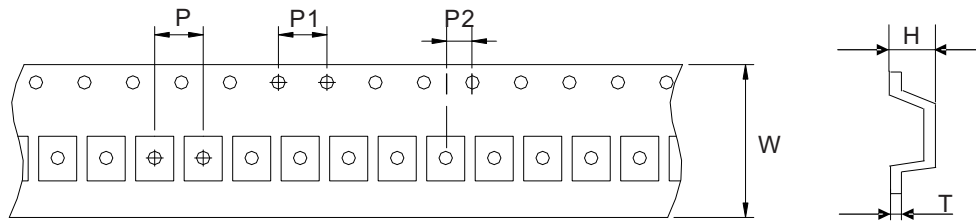

Unit: mm

Type	Dimension	W	P	P1	P2	H	T
	Tolerance	±0.3	±0.1	±0.1	±0.1	±0.15	±0.05
HIP1030		24.0	16.0	4.0	2.0	3.30	0.35

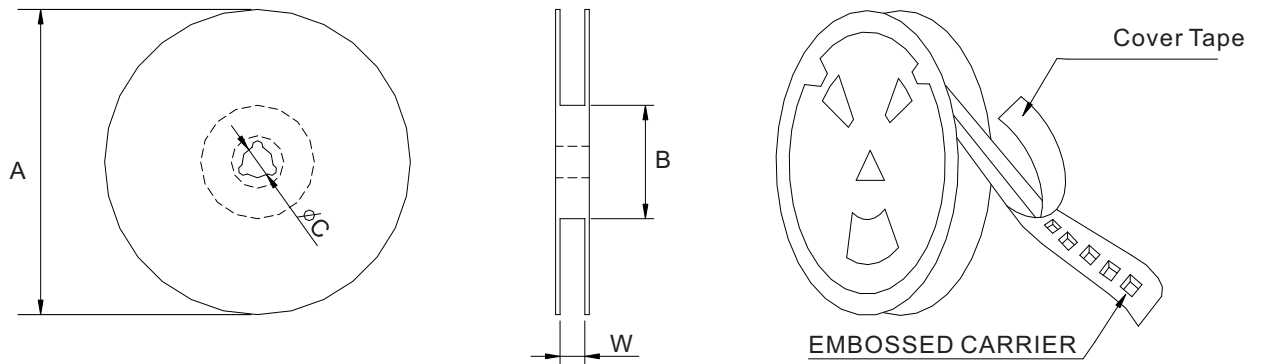

Unit: mm

Type	Dimension	QTY Per Reel	A	B	C	W
	Tolerance	PCS	±2.0	±0.5	±0.5	±0.5
HIP1030		800	330	97	13	24.8