
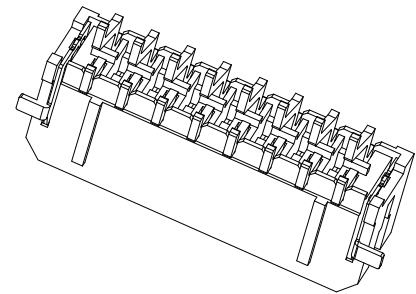


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2021.02.02	钟建虾

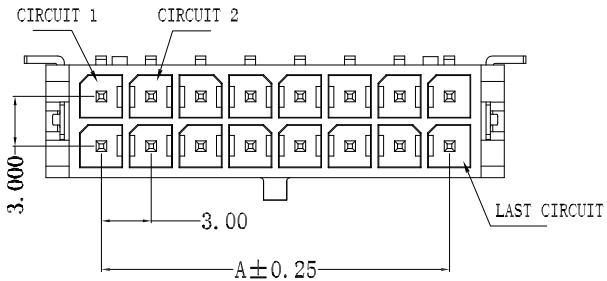






SPECIFICATION
Voltage rating: 250V AC, DC
Current Rating: 5A, AC, DC
Withstand voltage: 1500V AC/minute
Contact resistance: 20mΩ max
Insulation resistance: 1000MΩ min
After enviornment testing: 20mΩ max
Temperature range: -40℃ ~ +105℃

Materials
Contact Material: Brass
Insulator Material: UL 94V-0 LCP
All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

G WZD205-XX XX A 001 C X B X

No. of Pins per Row 01~12 Standard Plating 22=Matte Tin Selective Plating 01=Tin 02=Gold Flash Color 1=Black 2=White ... Standard Packing D=Tape&Reel

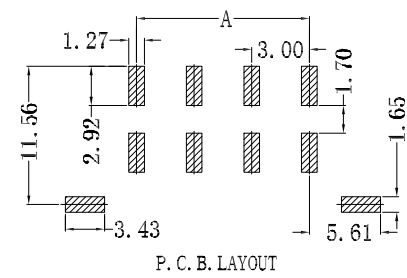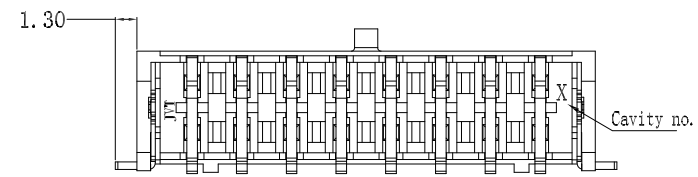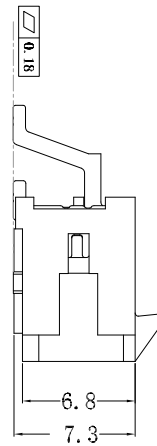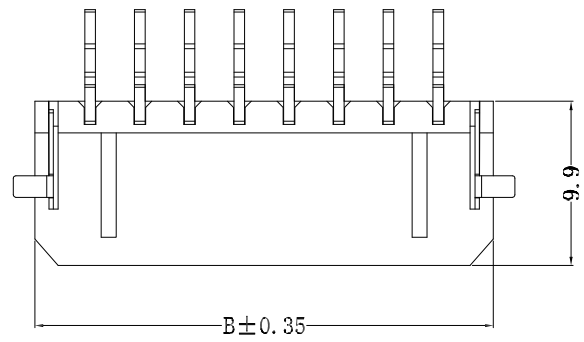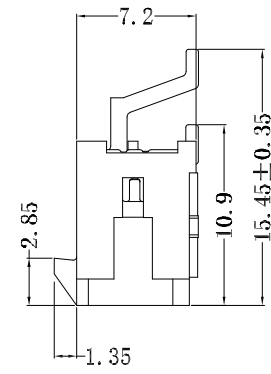

No. of PINS/ROW	Dimensions (mm)		No. of PINS/ROW	Dimensions (mm)	
	A	B		A	B
01	--	6.65	07	18.00	24.65
02	3.00	9.65	08	21.00	27.65
03	6.00	12.65	09	24.00	30.65
04	9.00	15.65	10	27.00	33.65
05	12.00	18.65	11	30.00	36.65
06	15.00	21.65	12	33.00	39.65

Greenconn
Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X' ± 3.0'	X ± 0.35
.X' ± 2.0'	.X ± 0.30
.XX' ± 1.5'	.XX ± 0.25
.XXX' ± 1.0'	.XXX ± 0.15

DESIGNED: 钟建虾 DATE: 2022.02.02
CHECKED: DATE:
APPROVED: DATE:

DWG. NO. GWZD205-CA001
PART NO. GWZD205-XXXXA001CXBX

TITLE. 3.0mm pitch wafer 90° SMT