


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2023.11.20	何東華

Specifications  
 Current Rating:3Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-55°C to +125°C  
 Materials  
 Contact Material:Copper alloy  
 High Temperature Thermoplastic: Suitable for Reflow Soldering Process UL 94V-0 (LCP,Nylon10T,NylonHTN)  
 All materials must meet Greenconn requirement for environment protection.

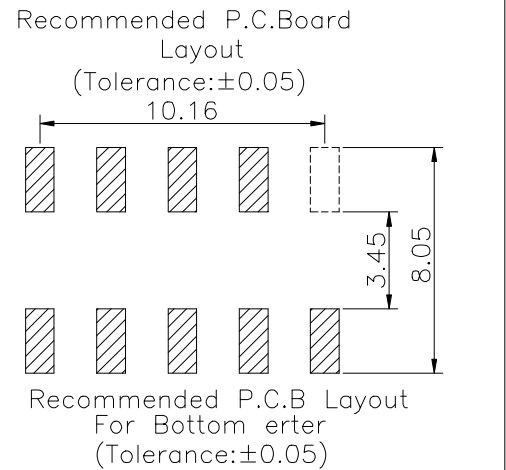

### Ordering Information

C SHC221 - XX XX A 665 X X X X

No. of Pins per Row 05  
 Standard Plating 02=Gold Flash  
 Selective Plating 01=Tin  
 05=Gold Flash/Tin

Insulator Material C=LCP  
 Y=Nylon-10T  
 R=Nylon-HTN

Color 1=Black  
 5=Natural

Contact Material A=Phosphor Bronze

Standard Packing C=Tube  
 Selective Packing A=box  
 D=Tape&Reel  
 E=Cap+Tube  
 F=Cap+Tape&Reel

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>	3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED: 何東華	DATE: 2023.11.20	DWG. NO. CSHC221-CA665	TITLE. 2.54 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR
		X:±5.0'	X:±0.30				
REV. A	UNIT. mm	SCALE. 4:1	PAGE. 1/1	.XX'±2.0'	.XX±0.15	PART NO. CSHC221-05XX A665XXXX	
				.XXX'±1.0'	.XXX±0.10		