



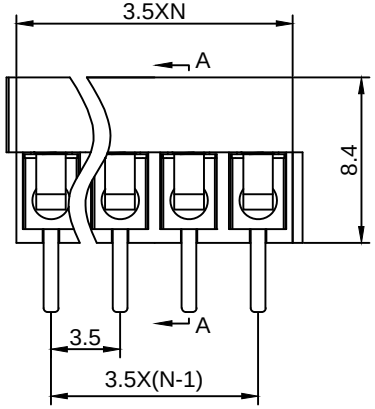





A-A



Material :

ⓐ Housing : PA66(UL94V-0)
ⓑ Screws : Steel , Cr^{3+}Zn Plated
ⓒ Wire Guard : Phosphor Bronze
ⓓ Pin Header : Brass , Tin Plated

Electrical :

	UL	IEC
1.Rated Voltage :	300V	130V
2.Rated Current :	7A	10A
3.Torque Value :	M2 , 1.77Lb.in	M2 , 0.2N.m
4.Wire Range:	24-18AWG	0.5-1.0mm^2

5.Stripping Length : 5mm
6.Withstanding Voltage : AC1250V/1Min.
7.Operating Temperature : -40°C~+105°C
8.RoHS Compliance
9.Safty Approval :
10.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					—	⌒	⌓
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10		
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00			±0.1°

GT350 – 3.5 – XXP – X X – 00 AH
① ② ③ ④ ⑤ ⑥ ⑦

① Sereies No.

② Pitch

③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts

④ 1 Single Pitch
2 Double Pitch

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request : 00--Standard

⑦ AH--Standard(PA66)

DETACHED LISTS

Golten® 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

APPD: MA_8/8/16 '	PART NO.	GT350-3.5-XXP-XX-00AH	
CHKD: Yu_8/7/16 '			
DRFT: Chen_8/6/16 '	DRAWING NO.	REV	1
		SHEET	1/1
THIRD ANGLE PROJECTION	MM (INCH) DO NOT SCALE DRAWING	SCALE	1/1

8 7 6 5 4 3 2 1
H G F E D C B A