

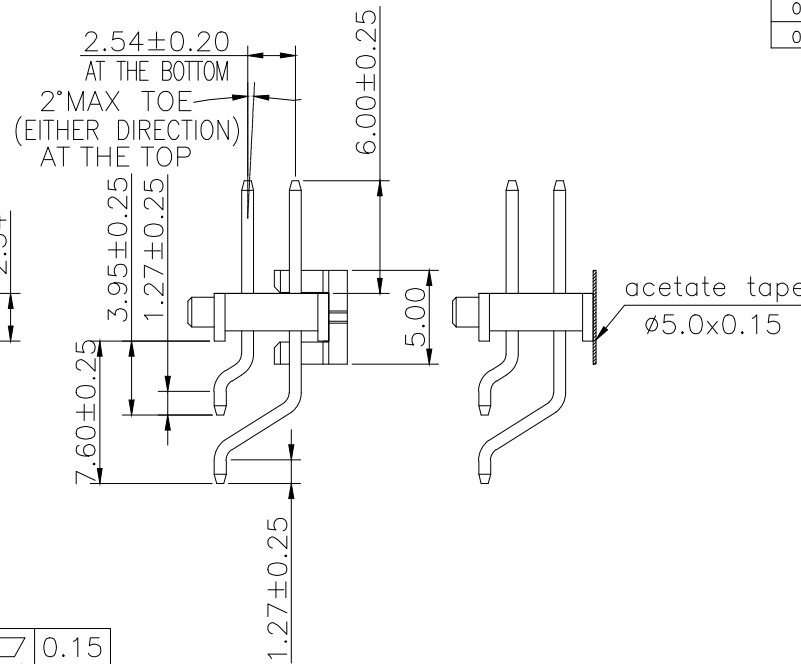


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2015.09.29	鍾湖南
02	△	Added 02pin (N-N240415)	2024.04.09	郭 康

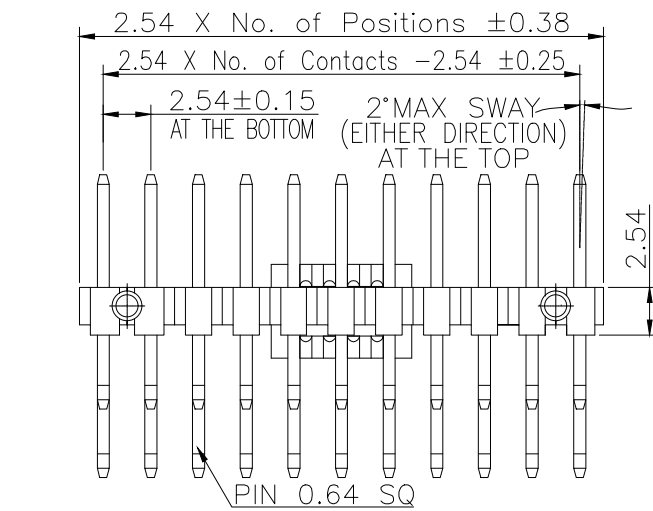

Specifications
Current Rating: 3Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding Voltage: 600VAC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Brass
Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

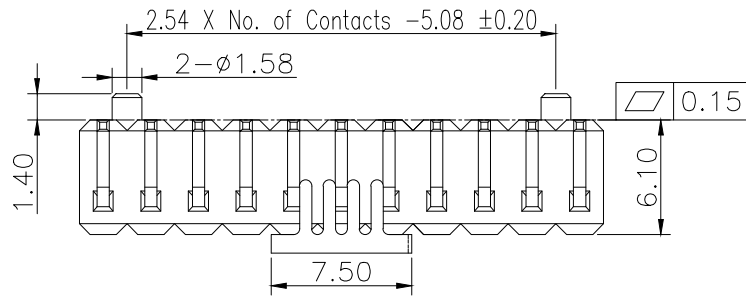

Ordering Information

G PHD207 - XX XX B 029 R 1 B X


No. of Pins per Row
02~30
△

Standard Plating
02=Gold Flash
Selective Plating
01=Tin


Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box
E=Cap+Tube
F=Cap+Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

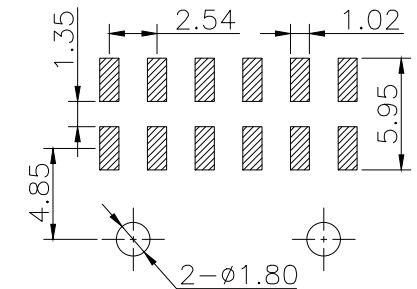

3RD.ANG
PROJ.



PAGE.
1/1

GENERAL TOLERANCE

X.* $\pm 5.0^\circ$	X. ± 0.30
.X.* $\pm 3.0^\circ$	.X. ± 0.25
.XX.* $\pm 2.0^\circ$	.XX ± 0.15
.XXX.* $\pm 1.0^\circ$	.XXX ± 0.10

DESIGNED: 郭 康

DATE: 2024.04.09

CHECKED: 張春進

DATE: 2024.04.09

APPROVED: 張春進

DATE: 2024.04.09

DWG. NO.

GPHD207-CB29RB

PART NO.

GPHD207-XXXX B029R1BX

TITLE.

2.54 PIN HEADER
DUAL ROWS SMT TYPE
CONNECTOR