

LITHIUM BATTERY

ER34615M

优点及特征

工作电压平稳，在应用的寿命期内具有高而稳定的电压响应 低自放电率（在 +25°C 的条件下贮存，年自放电率低于 1%）
气密的玻璃封口金属外盖
非可燃性电解液
卷绕式结构
已通过 CE、SGS 认证
通过 ISO9001 质量管理体系认证

Key Characteristics

High and stable operating voltage
Low self-discharge rate(less than 1% after 1 year storage at +25°C)
Hermetic glass-to-metal sealing
Non-flammable electrolyte
Spiral type
CE,SGS recognized
ISO9001 approved


性能数据

标称容量 14500mAh
额定电压 3.6V
最大连续工作电流 2000mA
最大脉冲电流 4000mA
电池重量 约 110g
电池最大外形尺寸 Ø34.0*61.5mm
工作温度 -60 °C ~ +85°C


Electrical Characteristics

Nominal capacity 14500mAh
Nominal voltage 3.6V
Max.continuous current 2000mA
Max.pulse current capability 4000mA
Weight Approx.110g
Dimension Ø34.0*61.5mm
Operating temperature range -60°C ~+85°C


25°C放电特性 Discharge Characteristics(25°C)

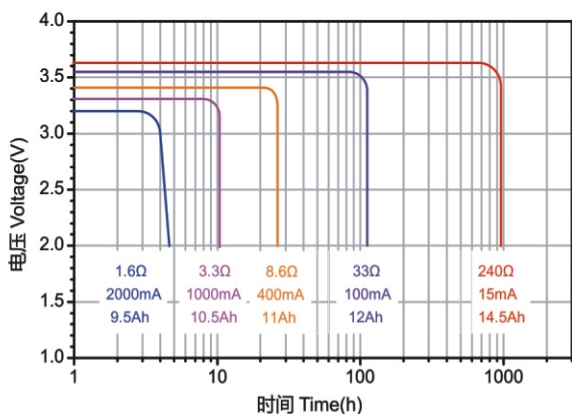


电压与温度关系 Voltage vs. Temperature

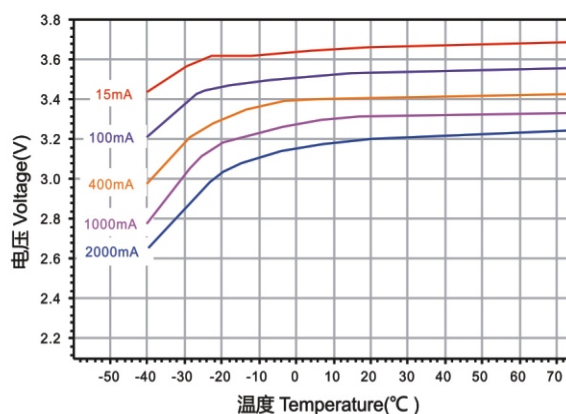

容量与电流关系 Capacity vs. Current

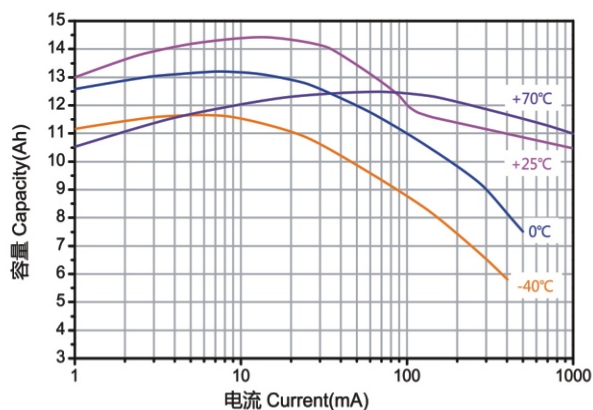

电池尺寸图 Battery Dimension

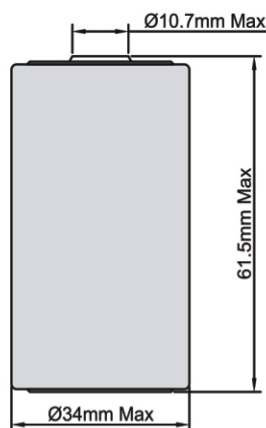

+ Available terminations:
-P axial pins
-2PT/T radial pins
-3PT/4PT polarized tabs

极端样式：
-P 轴向碰焊线
-2PT/T 径向插件
-3PT/4PT 多脚插件

+ Available terminations can be made as requested.
特殊极端样式可按客户要求订做