


8		7		6		5		4		3		2		1		
P1&P2		TOOLING TYPE						REV.		DESCRIPTION		DRAWN		APPROVED		DATE
INNER MOLDING		LS1-S1-S006-**						X1		NEW DRAWING		XINYUAN LI		ZHENG ZENG		2024.01.25

NOTE:连接器尾部美纹纸少许残留

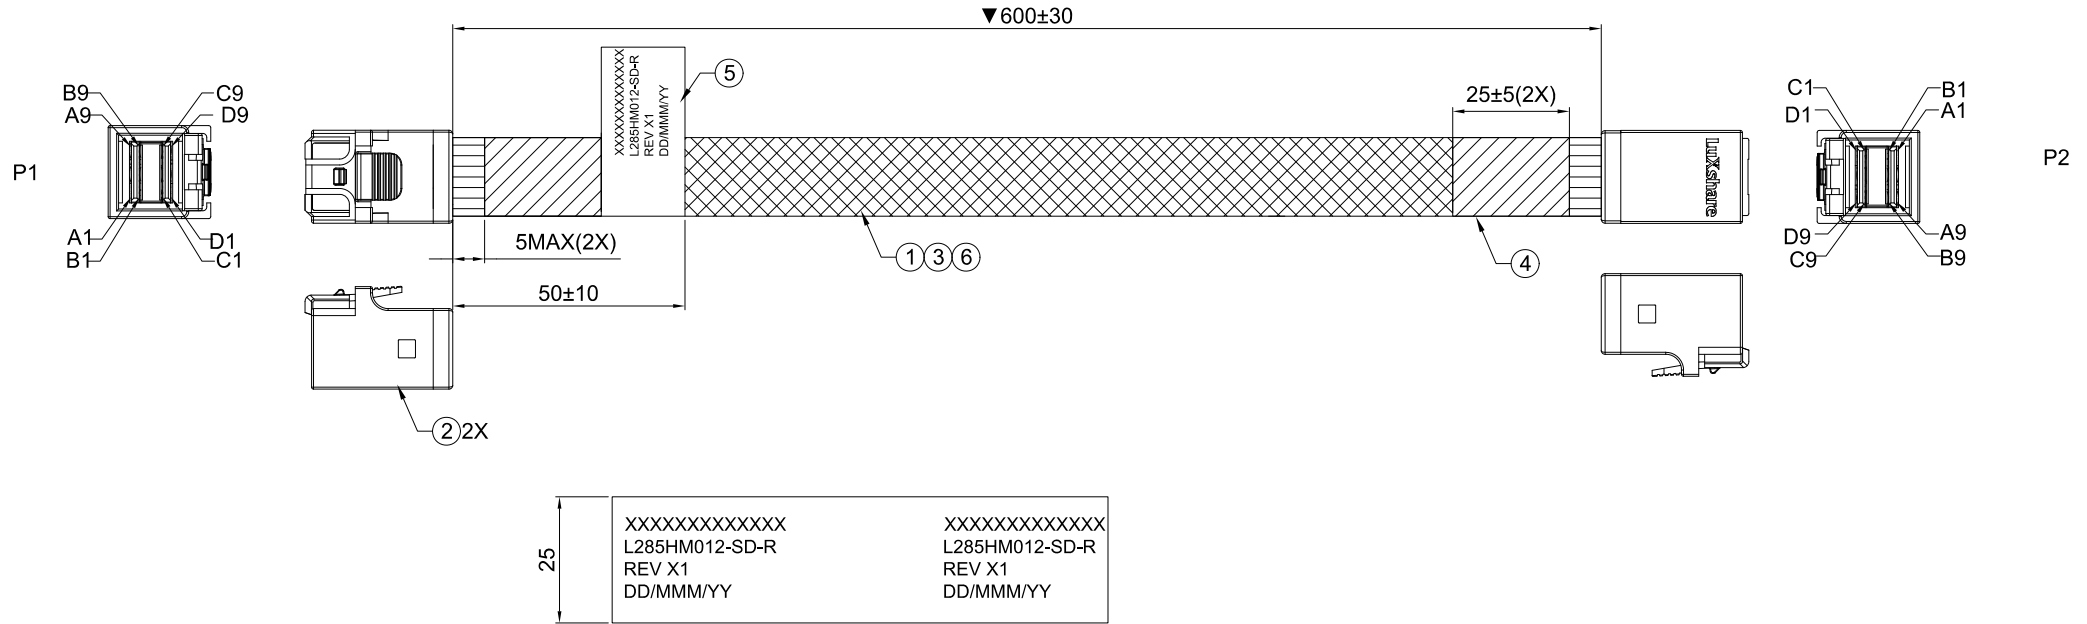


PRINT DETAIL(打印要求):  
 1.FONTS(字体):Arial;  
 2.HEIGHT(字高): 2mm;  
 3.COLOR: WHITE(白底黑字);  
 4.DD/MMM/YY(日/月/年)  
 EXAMPLE: 31/DEC/2018

NOTE:本产品需套防尘帽

⑥ FALT CABLE,UL3302,30AWGX2C,R2				A/R	X.± 1	X.°± /	Customer P/N:		LUXSHARE-TECH				
⑤ LABEL,W=25mm,WHITE,R2				1			.X± 0.3	.X°± /		Customer REV.:			
④ ACETATE TAPE,BLACK,R2				A/R	.XX± 0.20	.XX°± /	PART NO.						
③ BRAID MESH PET,BLACK,VW-1,R2				A/R	.XXX± 0.100	.XXX°± /	L285HM012-SD-R						
② MINISAS HD 41 CONN,STR,Au 30u",100Ω,94V-0,R2				2	UNITS:	mm	APPROVED: ZHENG ZENG			DWG NO:			
① SAS CABLE,UL20744,30AWG,TINNED COPPER,100Ω,BLUE,VW-1,R2				A/R	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-TECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-TECH		CHECKED: DONG SHEN		RDS2308028-015				
ITEM	DESCRIPTION			P/N	Q'TY	DRAWN: XINYUAN LI				SCALE	SHEET	REV.	
8	7			6	5	4		3		NONE	1/2	X1	
										2		1	

REV.	DESCRIPTION	DRAWN	APPROVED	DATE

WIRE TABLE

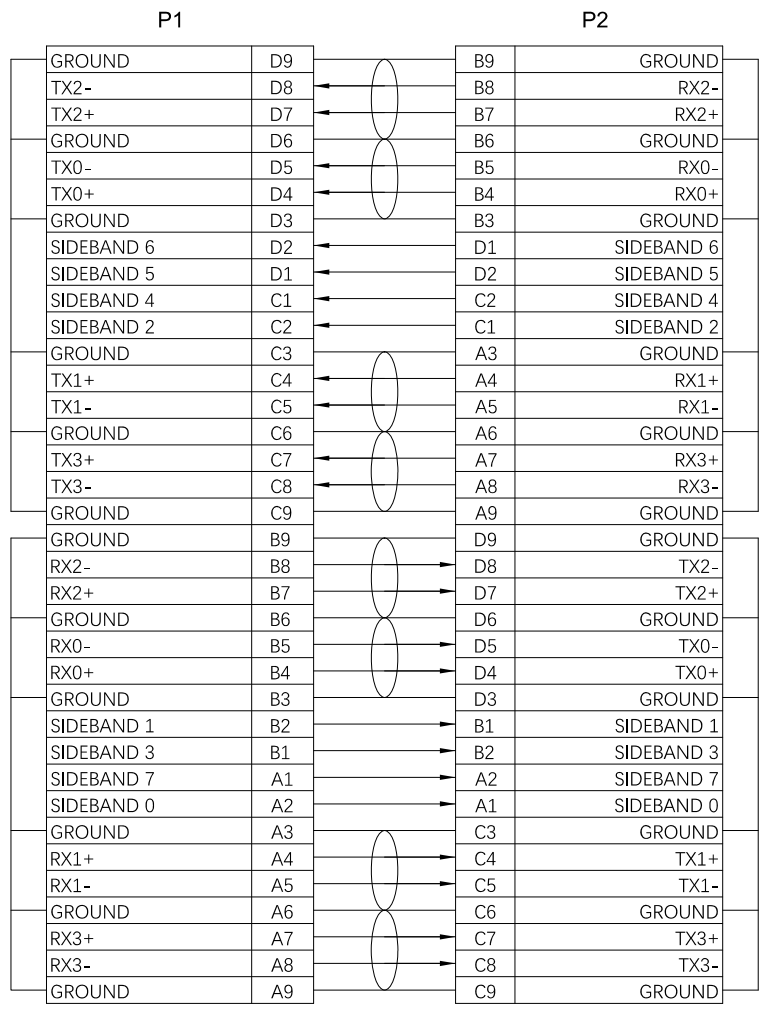

NOTE(说明):  
 1.ALL CABLE 100% OPEN, SHORT, MISS WIRE& TRANSIENT FAULT TEST:  
 (所有产品必须100%进行断路、短路、错位及间隙性接触测试)  
 2.THE DIMENSIONS MARKED ▼ SHALL BE CHECKED;  
 (标注▼的尺寸必须重点检验)  
 3.CONDUCTOR RESISTANCE(导通阻抗):2.0 ohm Max.;  
 4.INSULATION RESISTANCE(绝缘阻抗):10 Mohm Min/300VDC@10ms;  
 5.HIGH FREQUENCY CHARACTERISTIC PLEASE FOLLOW SAS 3.0 STANDARD.  
 (高频特性:符合 SAS 3.0规范要求)  
 Connector Impedance: 100±15% ohm, Cable Impedance: 100±10% ohm  
 (连接器阻抗: 100±15% ohm, 线材阻抗: 100±10% ohm)  
 7.ALL MATERIALS AND PROCESS MUST BE MEET THE REQUIREMENT OF QW-Q-043.  
 (本产品使用物料及制程须符合:QW-Q-043文件对应环境物质管理要求.)  
 8.THE DIMENSIONS OF MOLDING MUST BE MEET THE REQUIREMENT OF 1932007839.  
 (内部产品模型重点尺寸管控标准请参考文件1932007839.)  
 9.PROCESS MUST BE MEET THE REQUIREMENT OF 1972000010.  
 制程加工要求必须符合: 产品制程工艺规范(文档号1972000010)要求。

X.± 1	X.°± /	Customer P/N:	<b>LUXSHARE-TECH</b>						
.X± 0.3	.X°± /	Customer REV.:							
.XX± 0.20	.XX°± /	PART NO. L285HM012-SD-R	TITLE: HD MINI SAS TO HD MINI SAS CABLE						
.XXX± 0.100	.XXX°± /	APPROVED: ZHENG ZENG	DWG NO: RDS2308028-015						
UNITS:	mm	CHECKED: DONG SHEN	<table border="1"> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> <tr> <td>NONE</td> <td>2/2</td> <td>X1</td> </tr> </table>	SCALE	SHEET	REV.	NONE	2/2	X1
SCALE	SHEET	REV.							
NONE	2/2	X1							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-TECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-TECH		DRAWN: XINYUAN LI							