




Product NO.

RHT-664-0280

ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2023.06.02	JIM.KING

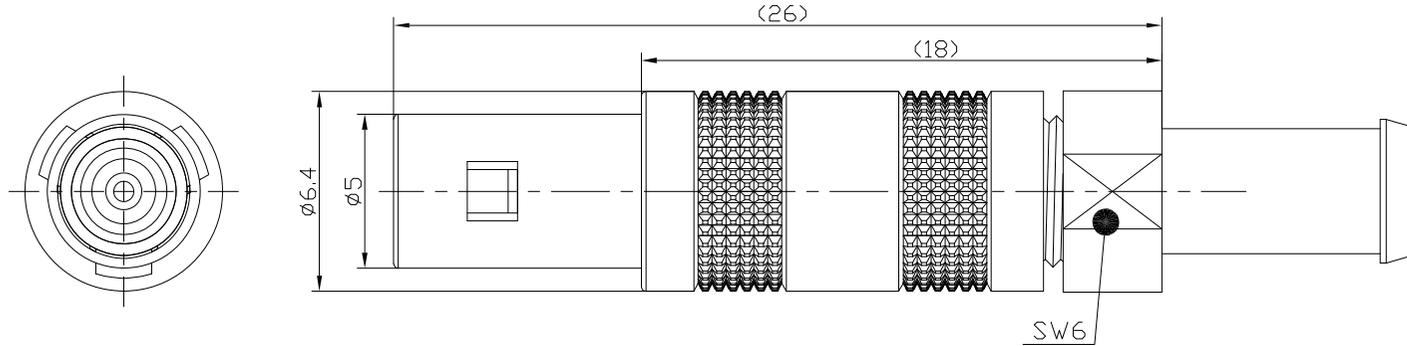


1, mechanical	
Shell material	Copper alloy,chrome plated
Contact material	tin bronze ,gold plated
Insulation material	PPS
Service life	5000+
2,Electrical	
Contact	See the table
rated current (A)	See the table
contact resistance (mΩ)	See the table
insulation resistance	5000MΩ
Withstand voltage	750V
3,Other	
working temperature	-55°C~+150°C
Relative humidity	90%~95%(40±2°C)
Salt fog	72H
Waterproof level	IP50

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED



RENHOTEC GROUP



PART DESCRIPTION:
FFA.00S.250.NTL

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm

Appr: JIM.KING

P/N: RHT-664-0280

Check:	Date	Scale	Unit	Type	Page
Draw: DING	2023.06.02	Free	MM	Z	1/1