



EC-R3576PC FD

Low-power large-model Computer

V1.0 2024-6-5

T-CHIP INTELLIGENCE TECHNOLOGY



Product features




High-performance octa-core 64-bit AIOT processor, RK3576

RK3576, the new octa-core 64-bit AIOT processor, features a big.LITTLE architecture (4xA72 +4xA53), an advanced lithography process, and a frequency of up to 2.2 GHz.



Built-in 6TOPS powerful computing power NPU

Supports mixed operations such as INT4/INT8/INT16, and can achieve network model transformation based on TensorFlow/MXNet/PyTorch and other frameworks.



8K@30fps Decoding/4K@60fps Encoding

It supports 8K@30fps/4K@120fps decoding(H.265/HEVC, VP9, AVS2, AV1) , 4K@60fps decoding(H.264/AVC), 4K@60fps encoding(H.265/HEVC, H.264/AVC).



The private deployment of large language models


Support the private deployment of ultra-large-scale parameter models under the Transformer architecture, including large language models such as Gemma-2B, LLaMa2-7B, and Qwen1.5-1.8B.Support Docker container management technology.

Product features



Industrial-grade metal enclosure with efficient fanless passive cooling

The device features an industrial-grade, all-metal enclosure with an aluminum alloy structure for efficient heat dissipation. Its fanless design contributes to silent operation, ensuring 24/7 uninterrupted and stable performance.



A wide range of expansion interface

A wide range of expansion interface options includes HDMI 2.1, Gigabit Ethernet, USB 3.0, USB 2.0, and Type-C (OTG/DP1.4).



Various operating systems

Support Android 14, Linux OS, and Buildroot+QT. These provide safe and stable systems for product research and production.



A wide range of applications



It is widely used in edge computing, local deployment of large models, intelligent digital signage, cloud terminal products, industrial PCs, automotive electronics, and more.

Specifications




Specifications		
Basic Specifications	SOC	Rockchip RK3576
	CPU	Octa-core 64-bit processor (4xA72 + 4xA53), up to 2.2GHz
	GPU	G52 MC3 @ 1GHz, support OpenGL ES 1.1/2.0/3.2, OpenCL 2.0, Vulkan 1.1, with high-performance 2D acceleration hardware embedded
	NPU	6 TOPS NPU, support mixed operations of INT4/8/16/FP16/BF16/TF32
	Decoding/Encoding	Decode: 8K@30fps/4K@120fps: H.265/HEVC, VP9, AVS2, AV1, 4K@60fps: H.264/AVC Encode: 4K@60fps: H.265/HEVC, H.264/AVC
	RAM	LPDDR4/LPDDR4x (4GB/8GB optional)
	Storage	eMMC (16GB/32GB/64GB/128GB/256GB optional), UFS2.0 (optional)
	Storage Expansion	1 * M.2 (Scalable 2242 PCIe NVMe/SATA SSD) (Inside the Computer), 1 * TF Card Slot
	Power	DC 12V (5.5mm*2.1mm, support 12V~24V wide voltage input)
	OS	Android14, Linux OS, Buildroot+QT
	Software support	<ul style="list-style-type: none"> The private deployment of ultra-large-scale parameter models under the Transformer architecture, including large language models such as Gemma-2B, LLaMa2-7B, ChatGLM3-6B, Qwen1.5-1.8B Traditional network architectures such as CNN, RNN, and LSTM; a variety of deep learning frameworks, including TensorFlow, PyTorch, MXNet, PaddlePaddle, and ONNX, as well as custom operator development Docker container management technology
	Size	116.0mm * 105.2mm * 31.5mm
	Weight	≈0.43kg
	Power consumption	Normal: 1.32W(12V/110mA), Max: 8.4W(12V/700mA), Min: 0.024W(12V/2mA)
	Environment	Operating Temperature: -20°C- 60°C Storage Humidity: 10% ~ 90%RH (non-condensing)
Interface Specifications	Internet	1 * Gigabit Ethernet (1000Mbps/RJ45), 2.4GHz/5GHz Dual-band WiFi (802.11a/b/g/n/ac), Bluetooth 5.0
	Video output	1 * HDMI2.1 (4K@120fps), 1 * DP1.4 (4K@120fps)
	Watch Dogs	External watchdogs
	USB	1 * USB3.0, 1 * USB2.0
	Expansion interface	1 * Type-C (OTG/DP1.4), 1 * 3.5mm Audio jack (Support MIC recording, American Standard CTIA)

Interface description

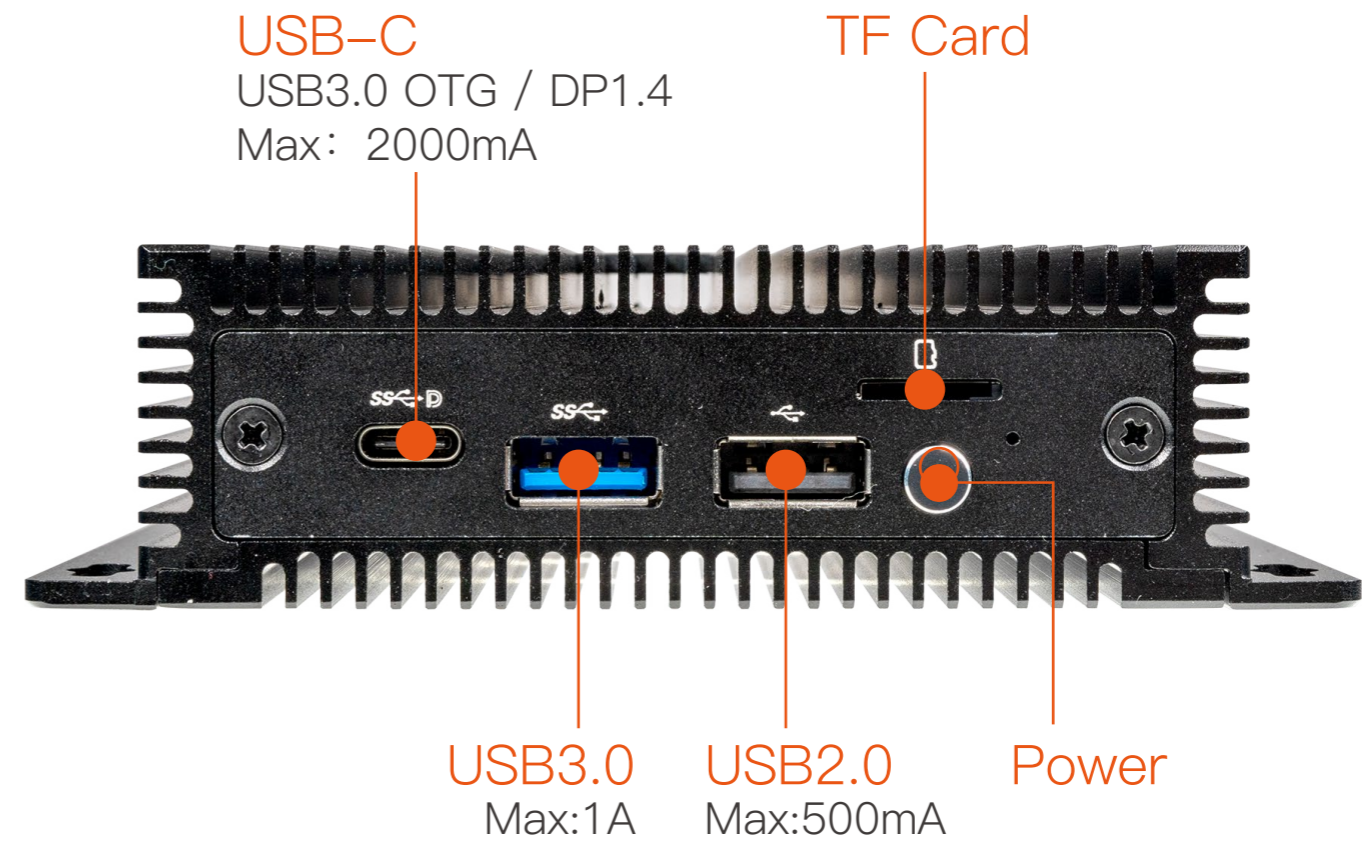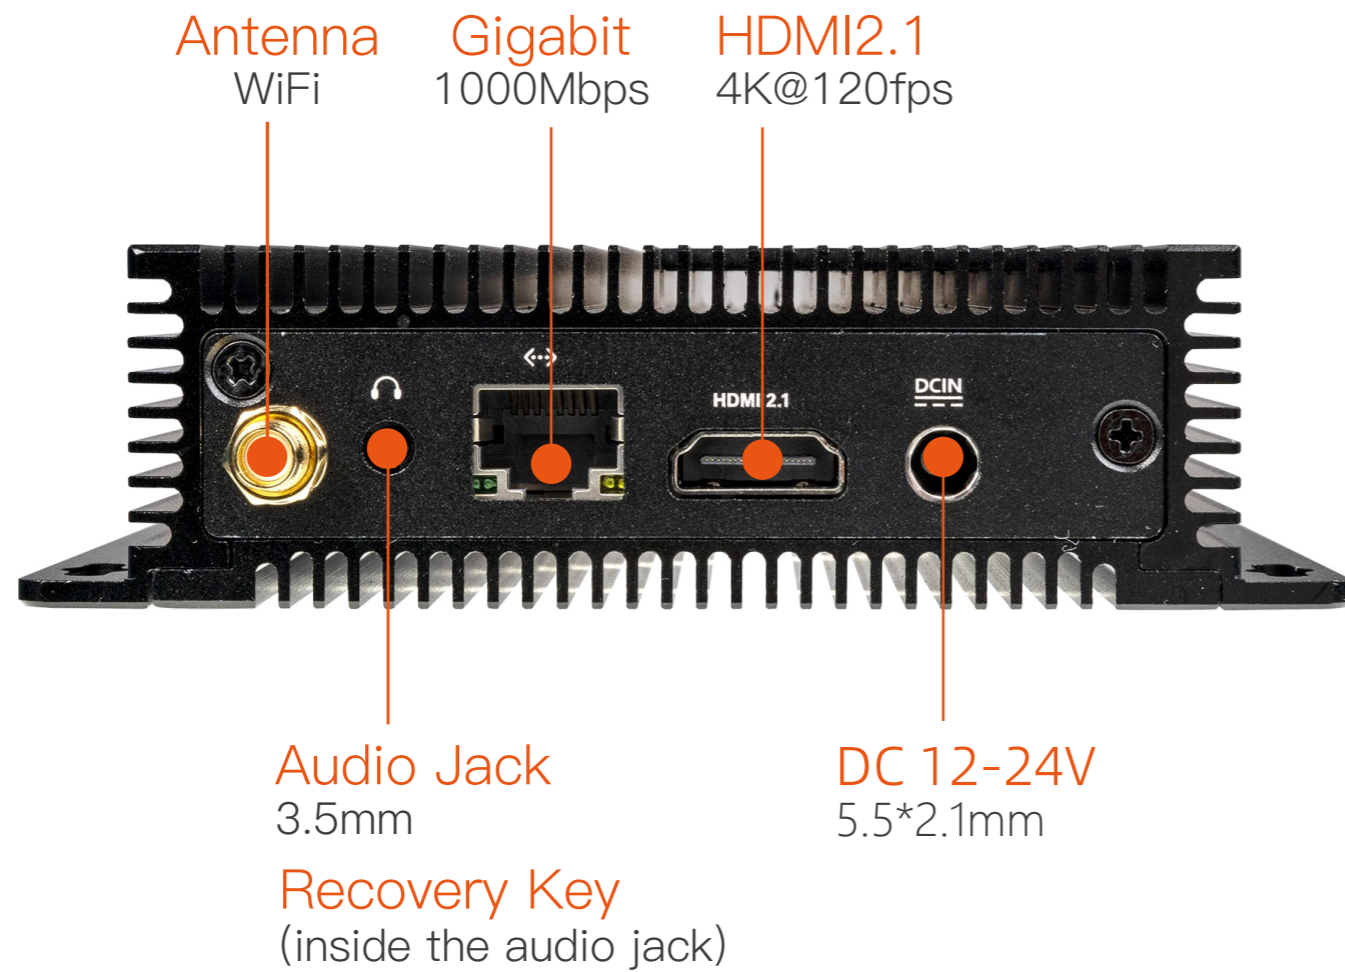

Dimension

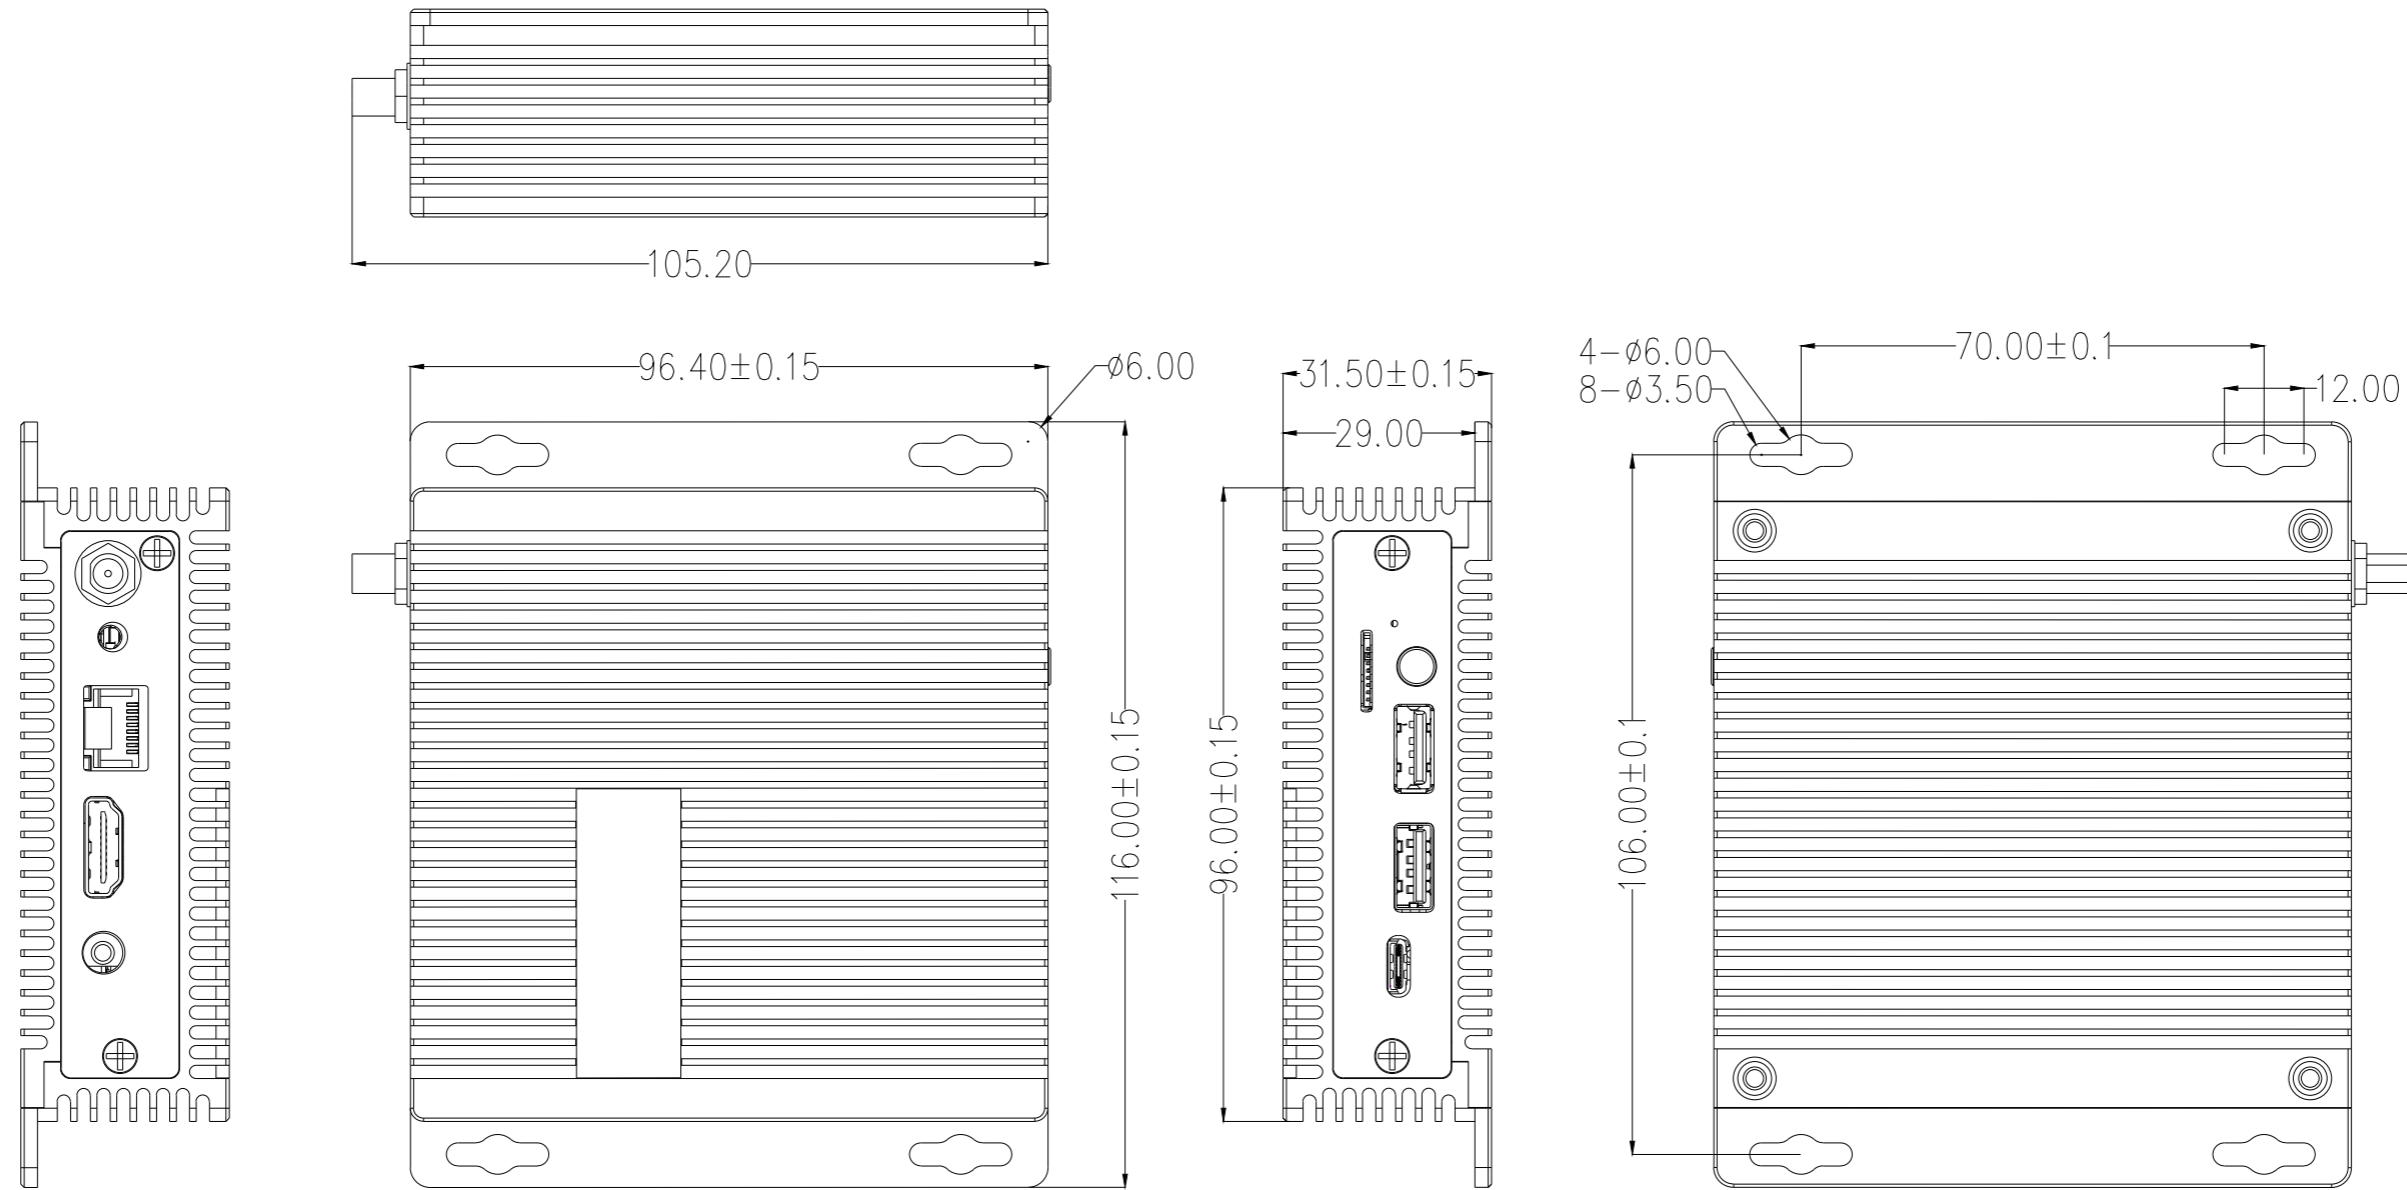



T-CHIP INTELLIGENCE TECHNOLOGY



Contact Us
(+86)18688117175



E-mail
global@t-firefly.com



Website
<https://en.t-firefly.com/>



Address
Room 2101, Hongyu Building, #57 Zhongshan 4Rd, East District,
Zhongshan, Guangdong, China.