

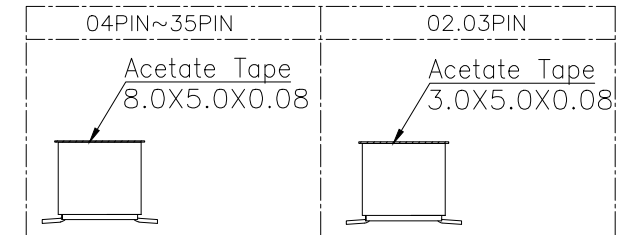


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2023.10.10	郭 康

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Copper alloy
High Temperture Thermoplastic: Suitable for
Reflow Soldering Process UL 94V-0 (LCP,
Nylon-10T,NYLON-HTN)
All materials must meet Greenconn
hazardous substances control standards.

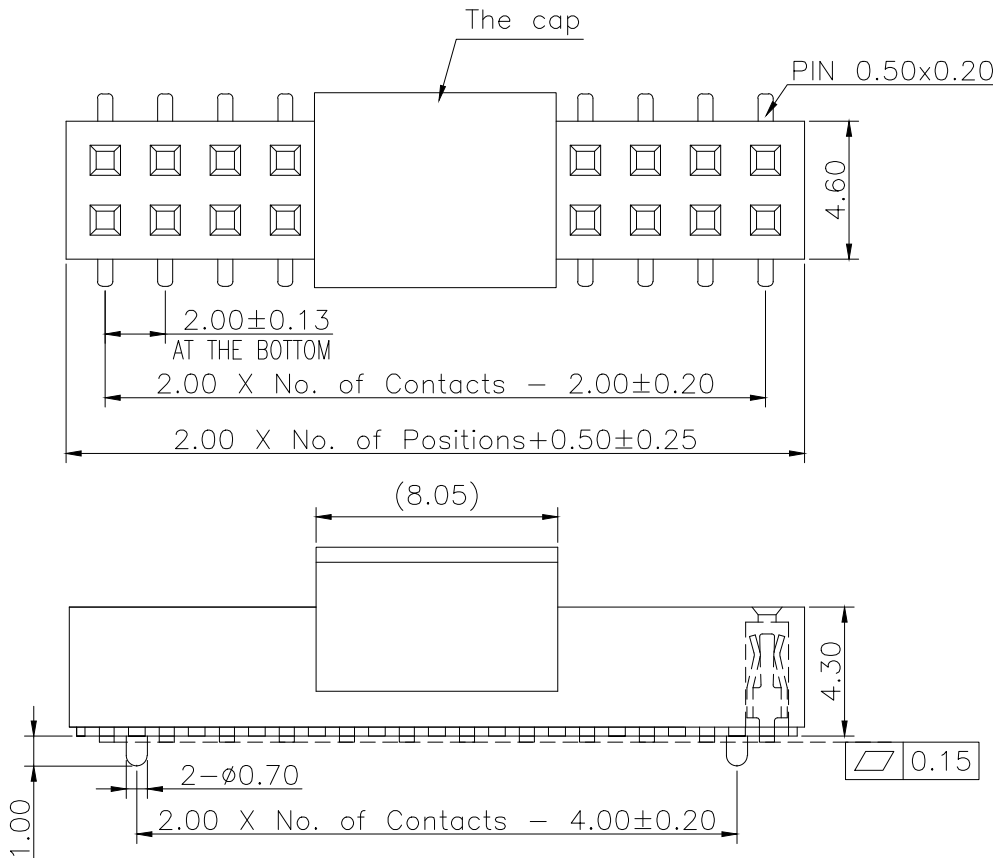

Recommended P.C.Board
Layout
(Tolerance:±0.05)

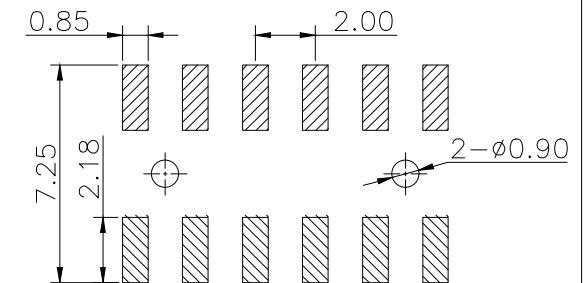

Ordering Information

C SFC201 - XX XX B 003 X X X X

No. of Pins per Row
03~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Insulator Material
Y=NYLON-10T
C=LCP
R=NYLON-HTN
J= NYLON- 9T


Color
1=Black
5=Natural

Contact Material
A=Phosphor Bronze

Standard Packing
D=Tape&Reel
Selective Packing
C=Tube(03~40PIN)
F=CAP+Tape&Reel
E=CAP+Tube(04~40PIN)
H=Acetate Tape+Tape&Reel
G=Acetate Tape+Tube(03~40PIN)



3RD.ANG
PROJ.



PAGE.
1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED: 郭 康

DATE: 2023.10.10

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CSFC201-CB003

PART NO.

CSFC201-XXXX B003XXXX

TITLE.

2.00 FEMALE HEADER
DUAL ROWS SMT TYPE
CONNECTOR