




Product NO.		RHT-649-0601		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	LuRihong	2023/05/17	JIM.KING

内牙

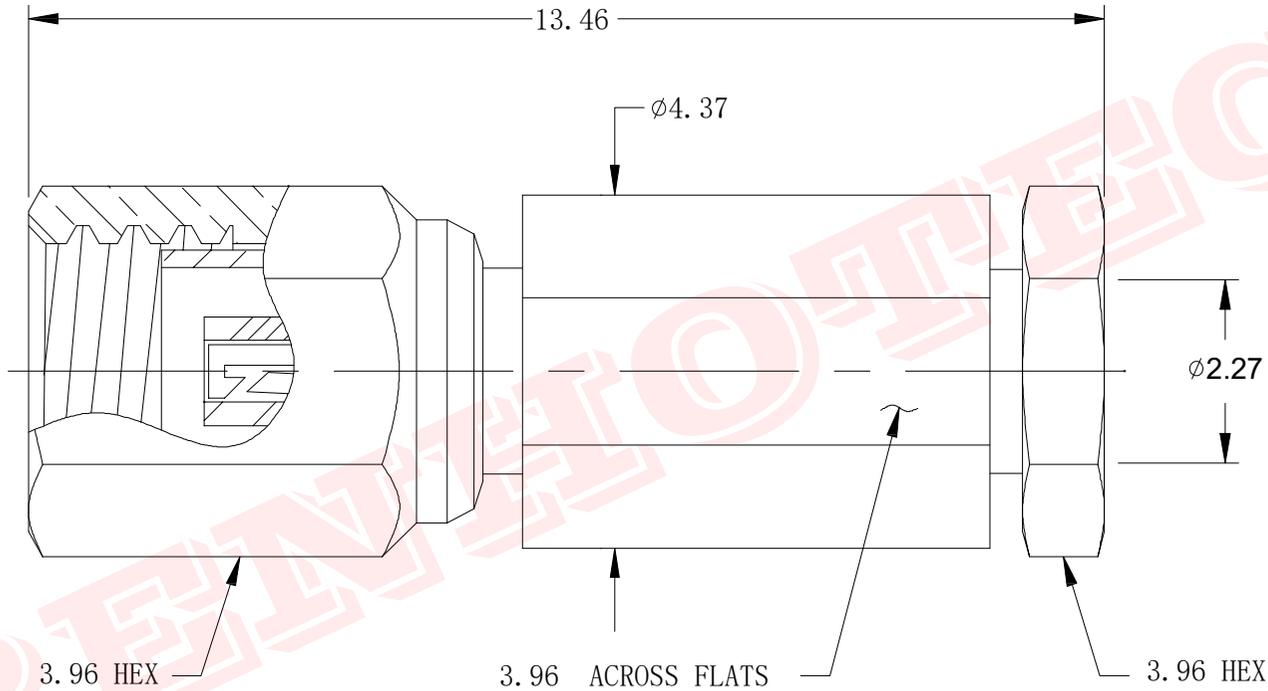

Specifications :  
 IMPEDANCE: 50 Ohms  
 Frequency range: 0~12.4GHZ  
 VSWR: 1.5MAX  
 Working voltage: 335Vrms @ sea level  
 Insulation resistance: 1000 MOhms min  
 Temperature range: -50°C TO +155°C

3	Center contact	Brass	Gold	1
2	Insulator	PTFE	NATURE	1
1	Body	Brass	Gold	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	<b>RENHOTEC GROUP</b>	
	PART DESCRIPTION: SSMC JACK FOR .085 CABLE	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appd: JIM.KING	P/N: RHT-649-0601
	Check:	Date: 2023.05.17
	Draw: LuRihong	Scale: Free
	Unit: MM	Type: Z
	Page: 1/1	