



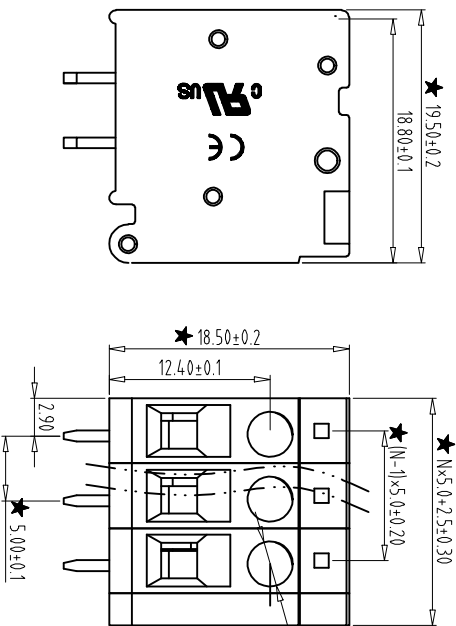



REV	CONTENT	CHK	DATE
VO.0	CONTENT	LZW	23.02.17

Electrical :

UL	IEC
1. Rated Voltage : 300V	250V
2. Rated Current : 20A	24A
3. Wire Range: 30-12AWG	0.5-2.5mm ²
4. Torque Value : 3.54Lb.in	0.4N.m
5. Stripping Length : 12mm	
6. Withstanding Voltage : AC2000V/1Min.	
7. Operating Temperature : -40°C~+105°C	
8. RoHS Compliance	
9. Safety Approval : 	
10. "x" is the key quality control point	

PCB LAYOUT

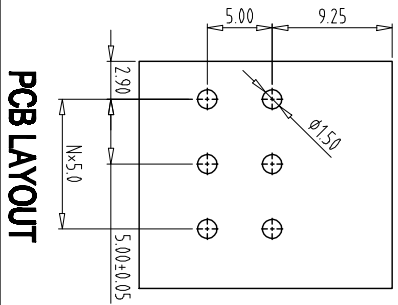

⑥ Customer Request: 00-Standard

Total Pitch Tolerances		Nominal dimension range					
in mm		in mm					
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250
to	to	to	to	to	to	to	to
30	53	70	90	115	150	250	350
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70
±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30
±0.35	±0.44	±0.60	±0.70	±0.85	±0.55	±0.70	±0.80
0.2	0.3	0.3	0.3	0.2	0.2	0.3	0.5

6	PIN	XXXXXX	P	COPPER ALLOY	Tin Plated
5	SLIDER	XXXXXX	P	STEEL	Zn Plated
4	CAGE	XXXXXX	P	STEEL	Zn Plated
3	SCREW	XXXXXX	P	STEEL	Zn Plated
2	COVER	XXXXXX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XXXXXX	P	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	23.02.17	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK	DATE	SCALE	1:1		
APP	DATE				
					
宁波冠泰电子有限公司					
NINGBO GOLDTEN ELECTRONICS CO., LTD.					
GT105R-5.0-XXP-XX-00					
XXXXXX					