


8	7	6	5	4	3	2	1
P1&P2	TOOLING TYPE	REV. DESCRIPTION			DRAWN	APPROVED	DATE
INNER MOLDING	LS1-S1-S006-**	X1 NEW DRAWING			XINYUAN LI	ZHENG ZENG	2024.01.25

NOTE:连接器尾部美纹纸少许残留

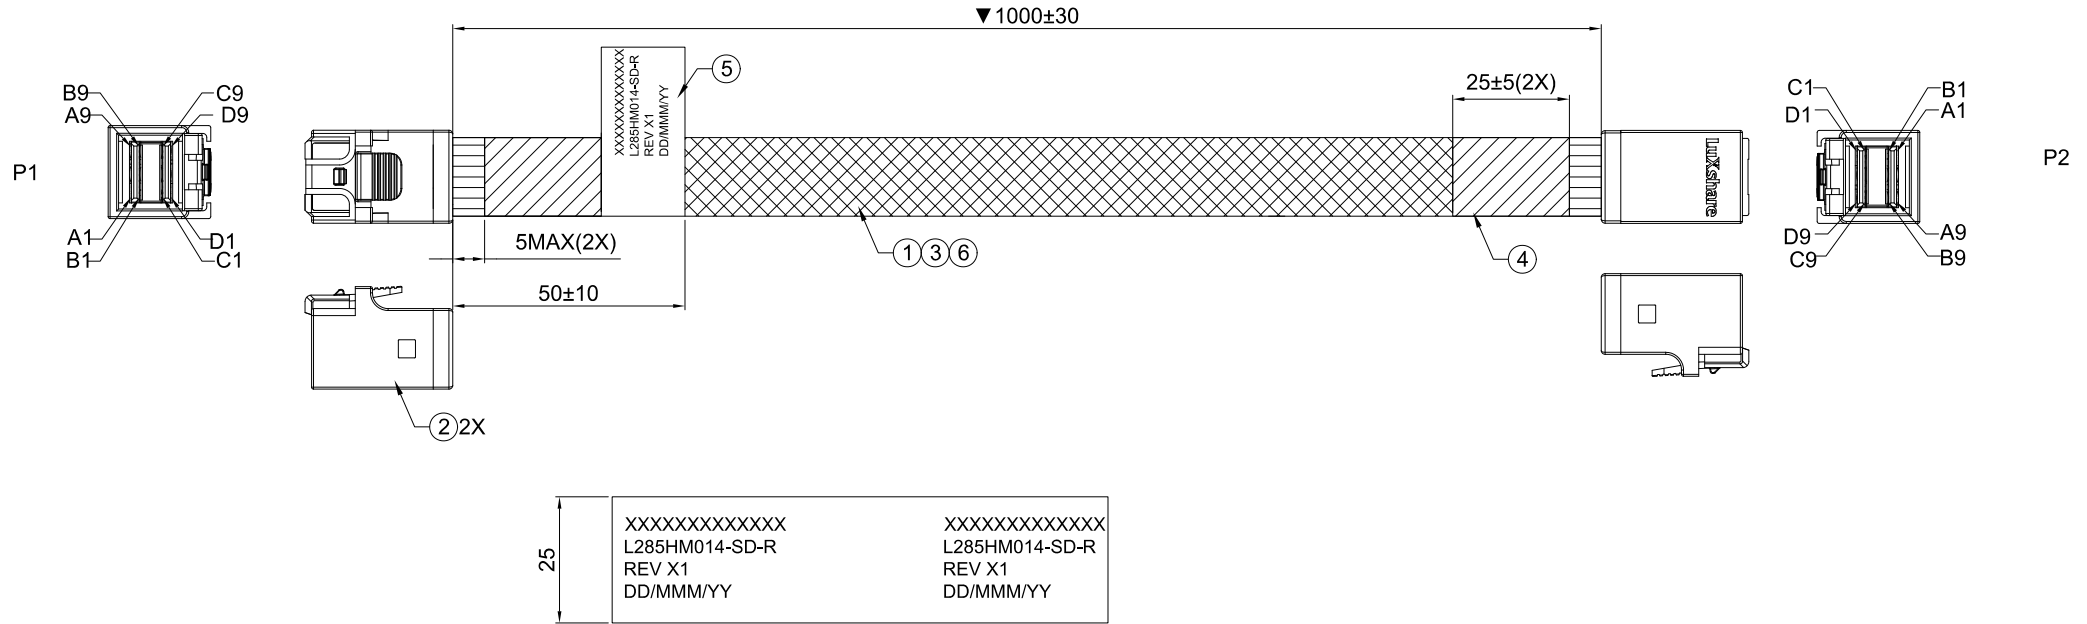


PRINT DETAIL(打印要求):
 1.FONTS(字体):Arial;
 2.HEIGHT(字高): 2mm;
 3.COLOR: WHITE(白底黑字);
 4.DD/MM/YY(日/月/年)
 EXAMPLE: 31/DEC/2018

NOTE:本产品需套防尘帽

⑥	FALT CABLE,UL3302,30AWGX2C,R2	A/R	X.± 1 .X± 0.3 .XX± 0.20 .XXX± 0.100 UNITS: mm THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-TECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-TECH	Customer P/N:	LUXSHARE-TECH TITLE: HD MINI SAS TO HD MINI SAS CABLE DWG NO: RDS2308028-017			
⑤	LABEL,W=25mm,WHITE,R2	1		Customer REV.:				
④	ACTEATE TAPE,BLACK,R2	A/R		PART NO. L285HM014-SD-R				
③	BRAID MESH PET,BLACK,VW-1,R2	A/R		APPROVED: ZHENG ZENG				
②	MINISAS HD 4I CONN,STR,Au 30u",100Ω,94V-0,R2	2		CHECKED: DONG SHEN				
①	SAS CABLE,UL20744,30AWG,TINNED COPPER,100Ω,BLUE,VW-1,R2	A/R		DRAWN: XINYUAN LI				
ITEM	DESCRIPTION	P/N	Q'TY		SCALE	SHEET	REV.	
8	7	6	5	4	3	2	1	
						NONE	1/2	X1

REV.	DESCRIPTION	DRAWN	APPROVED	DATE
------	-------------	-------	----------	------

WIRE TABLE

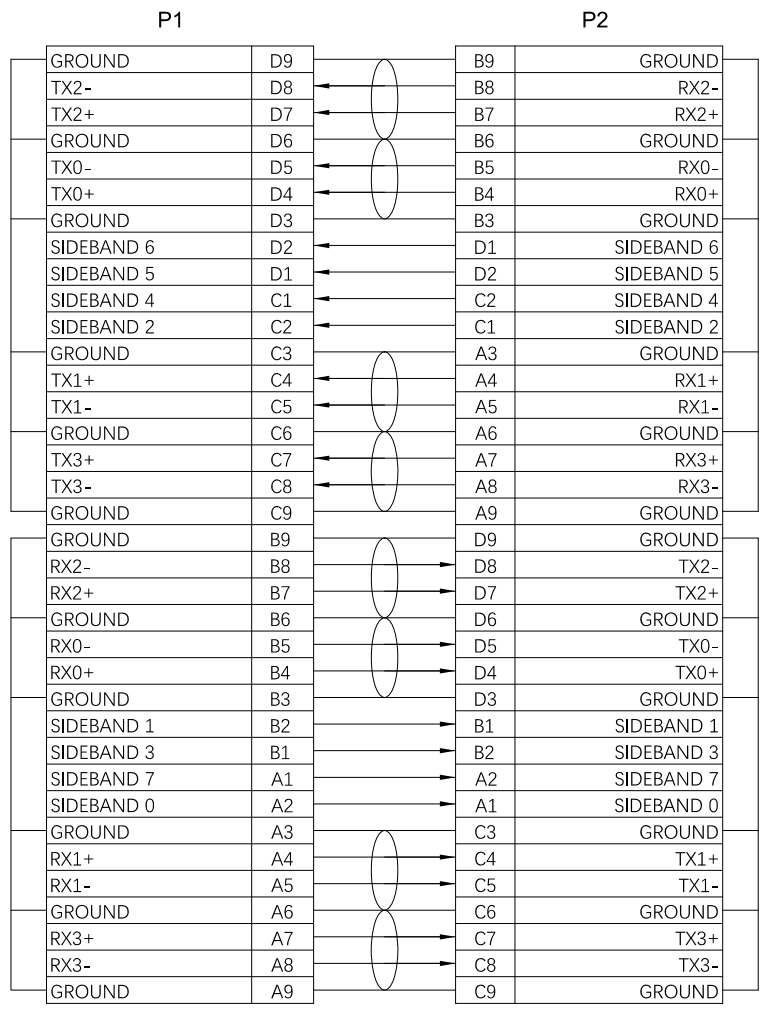

NOTE(说明):
 1.ALL CABLE 100% OPEN, SHORT, MISS WIRE& TRANSIENT FAULT TEST:
 (所有产品必须100%进行断路、短路、错位及间隙性接触测试)
 2.THE DIMENSIONS MARKED ▼ SHALL BE CHECKED;
 (标注▼的尺寸必须重点检验)
 3.CONDUCTOR RESISTANCE(导通阻抗):2.0 ohm Max.;
 4.INSULATION RESISTANCE(绝缘阻抗):10 Mohm Min/300VDC@10ms;
 5.HIGH FREQUENCY CHARACTERISTIC PLEASE FOLLOW SAS 3.0 STANDARD.
 (高频特性:符合 SAS 3.0规范要求)
 Connector Impedance: 100±15% ohm, Cable Impedance: 100±10% ohm
 (连接器阻抗: 100±15% ohm, 线材阻抗: 100±10% ohm)
 7.ALL MATERIALS AND PROCESS MUST BE MEET THE REQUIREMENT OF QW-Q-043.
 (本产品使用物料及制程须符合:QW-Q-043文件对应环境物质管理要求.)
 8.THE DIMENSIONS OF MOLDING MUST BE MEET THE REQUIREMENT OF 1932007839.
 (内部产品模型重点尺寸管控标准请参考文件1932007839.)
 9.PROCESS MUST BE MEET THE REQUIREMENT OF 1972000010.
 制程加工要求必须符合: 产品制程工艺规范(文档号1972000010)要求。

X.± 1	X.°± /	Customer P/N:	LUXSHARE-TECH						
.X± 0.3	.X°± /	Customer REV.:							
.XX± 0.20	.XX°± /	PART NO. L285HM014-SD-R	TITLE: HD MINI SAS TO HD MINI SAS CABLE						
.XXX± 0.100	.XXX°± /	APPROVED: ZHENG ZENG	DWG NO: RDS2308028-017						
UNITS:	mm	CHECKED: DONG SHEN	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>NONE</td> <td>2/2</td> <td>X1</td> </tr> </table>	SCALE	SHEET	REV.	NONE	2/2	X1
SCALE	SHEET	REV.							
NONE	2/2	X1							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-TECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-TECH		DRAWN: XINYUAN LI							