

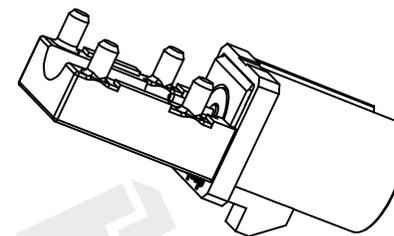

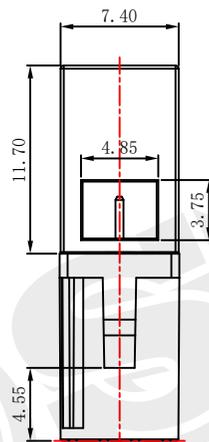


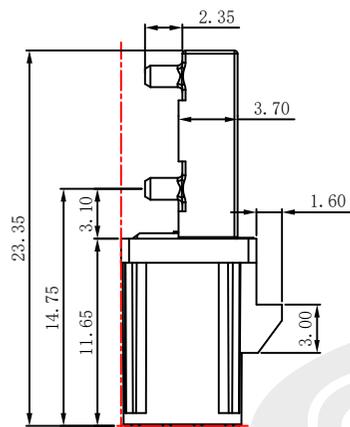

版本 Rev	说明 Description	Date	批准 Appr
A	FIRST ISSUE	2023. 12. 08	

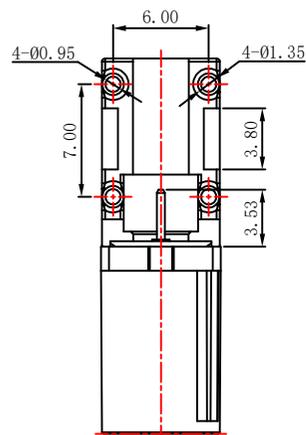

- > Electrical Performance:
1. Insulation impedance: 100MΩ min
 2. Contact resistance: 10mΩ max
 3. Resistance voltage: 500V AC
 4. plug and remove life: 100 times
 5. characteristic impedance: 50Ω
 6. Frequency range: 0-3G
- > Operating temperature: -40℃~105℃

KEY	颜色号	型号	颜色号	型号
A	黑色RAL9005	DS1-0101M3003-A	H	紫色RAL4003
B	白色RAL9001	DS1-0102M3003-A	I	米黄色RAL1001
C	蓝色RAL5005	DS1-0103M3003-A	K	咖喱色RAL1027
D	红酒色RAL4004	DS1-0104M3003-A	L	深红色RAL3002
E	绿色RAL6002	DS1-0105M3003-A	M	橙色RAL2003
F	棕色RAL8011	DS1-0106M3003-A	N	粉绿色RAL6019
G	灰色RAL7031	DS1-0107M3003-A	Z	水蓝色RAL5021

5	FAKRA 公头 90度SMT (D型)	401-0203004-A	中心针: 黄铜	镀金	1
4		301-1502001-A	胶芯: PTFE	白色	1
3		401-0309002-A	四脚五金: 锌合金	雾锡	1
2		301-1303001-A	胶壳: PA46		1
1	名称 (NAME)	料号 (P/N)	规格 (SPECIFICATION)	表面处理 (FINISH)	用量 (QTY)



东莞市德索精密工业有限公司

图号 DWG NO	品名 PART NAME	FAKRA 公头90度SMT			
未注公差 TOLERANCE UNSPECIFIED	料号 PART NO.	DS1-01XXM3003-A			
0.5 - 8mm ± 0.20mm	日期 Date	比例 Scale	单位 Unit	版本 Rev	页码 Page
8 - 30mm ± 0.25mm	2023. 12. 08	1: 1	MM	A	1/1
30 - 120mm ± 0.30mm	绘图 Draw				
X° ± 2°	Gavin				
X.X° ± 1°					