


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material

Recommended P.C. Board Layout
(Tolerance: ±0.05)

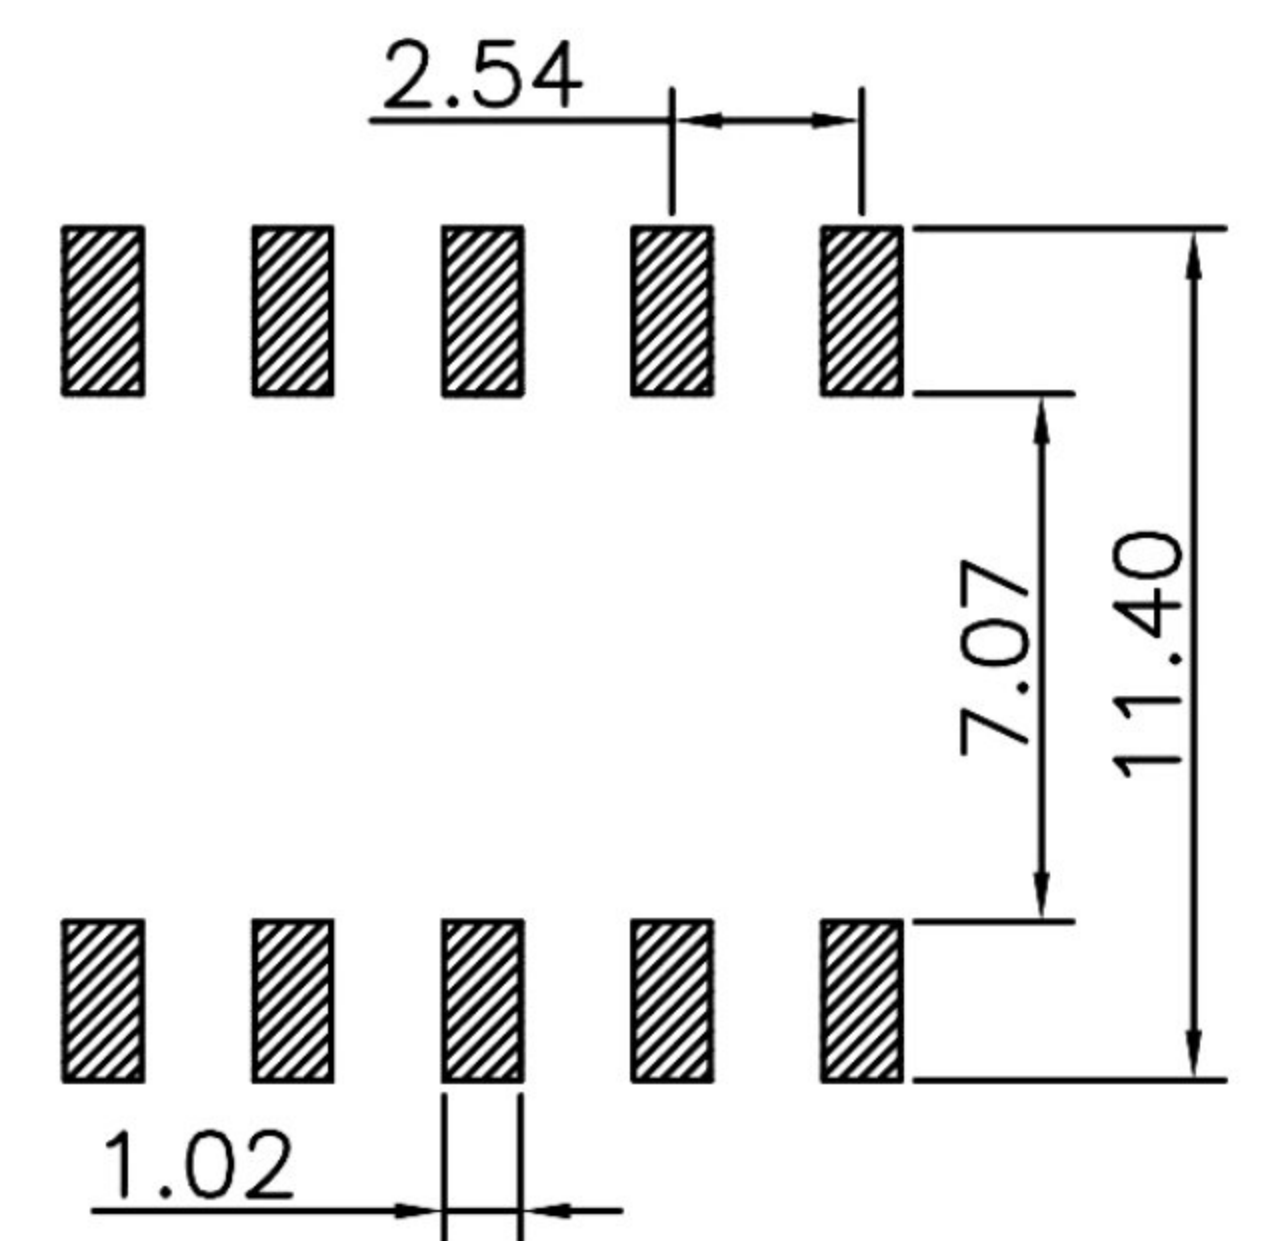

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE X* ± 5% X ± 0.30 X* ± 5% X ± 0.25 XX* ± 2% XX ± 0.15 XXX* ± 1% XXX ± 0.10	PART NAME 品名 2.54mm SINGLE ROW FEMALE HEADER SIDE ENTRY SMT TYPE H: 3.4mm 1XXXP GOLD FLASH PLATING ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C6819-XXAIXH0XR
DATE 制表日 2016/08/26	PAGE 張數 1 OF 1	REV. 版次 B	