


标“*”为重点检验尺寸
所用物料均符合ROHS标准

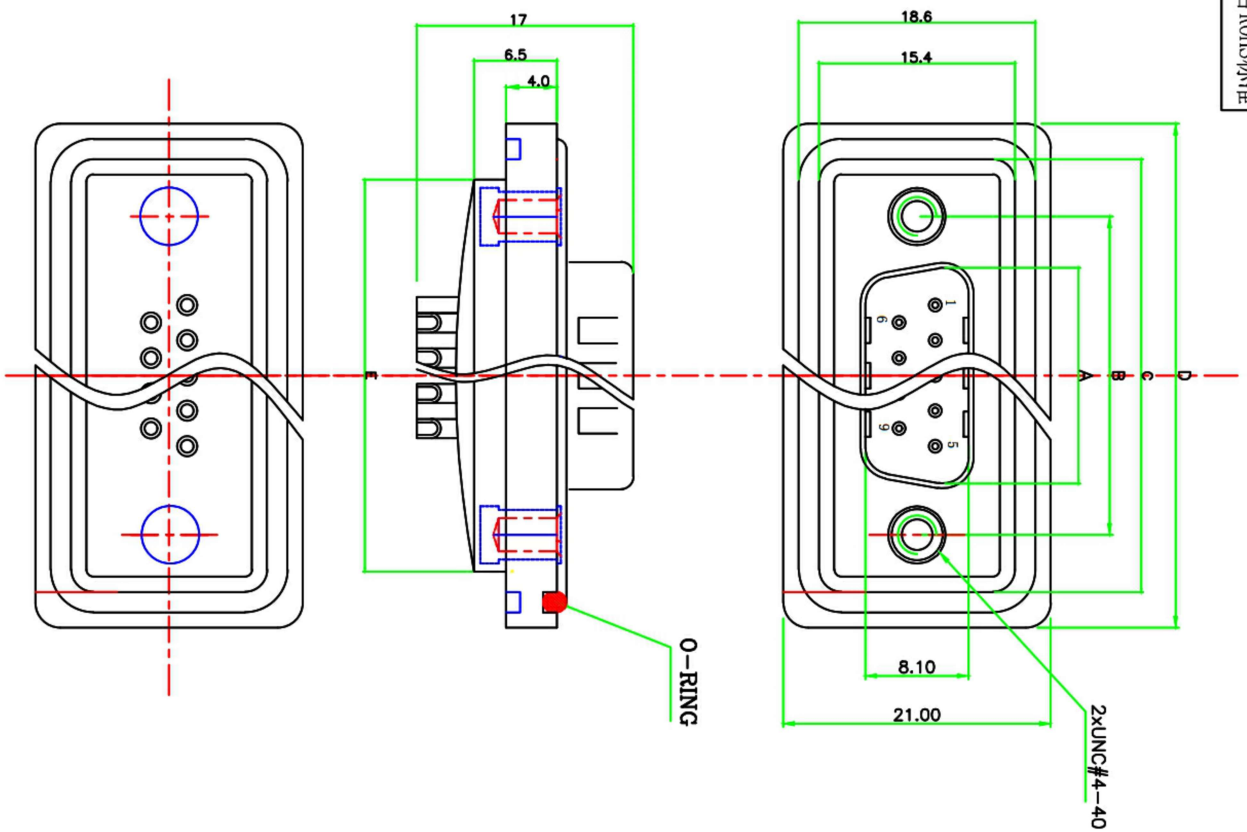

P.0(XXX)	No. of Contact	A±0.25	B±0.13	C±0.25	D±0.38	E±0.25
009	9	16.92	24.99	33.98	39.58	33.98
015	15	25.25	33.32	42.30	47.90	42.30
025	25	38.96	47.04	56.02	61.62	55.92
037	37	55.42	63.50	72.48	76.08	72.48

MATERIALS AND FINISH

SHELL : STEEL,TIN FINISHED
 INSULATOR : PBT UL94V-0 BLACK COLOR
 SIGNAL CONTACT: COPPER ALLOY,GOLD PLATED
 WATERIGHT FRAME: PBT UL94-0 BLACK COLOR
 O-RING : SILICONE
 EPOXY SEALANT: EPOXY

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING: 5.0 AMPS
 SIGNAL CONTACT RESISTANCE 10mΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC MIN.
 INSULATION RESISTANCE : 5GΩ MIN.
 TEMPERATURE RATING : -55°C ~ +105°C
 DEGREE OF PROTECTION: IP67 ACCORD



深圳市敏锐连接器有限公司
 Shenzhen Rigol Connector Co.,Ltd

TOLERANCE:		DRAWN BY :		PART NAME:	
XX	±0.30			D-SUB-15-M-SD	
XXX	±0.10	CHECKED BY :	DATE :	DRAW NO.	
XXXX	±0.05	APPROVED BY :	DATE :	PART NO.	
X* ±5°	XX* ±2°			REMARK	
				MOLD NO.	
UNIT: mm [inch]					
SCALE:1:1	SIZE: A4				