





REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2021.11.30	张汝楼

### Specifications


Current Rating: 5A AC,DC  
 Current Voltage: 250V AC,DC  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 1500VAC/minute  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -25°C to +85°C

### Materials

Contact Material: Brass  
 Insulator Material: LCP, UL 94V-0  
 All materials must meet Greenconn hazardous substances control standards.

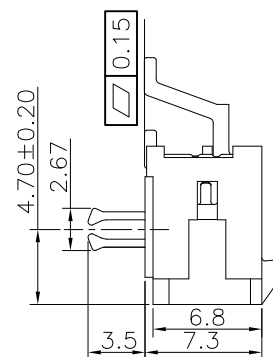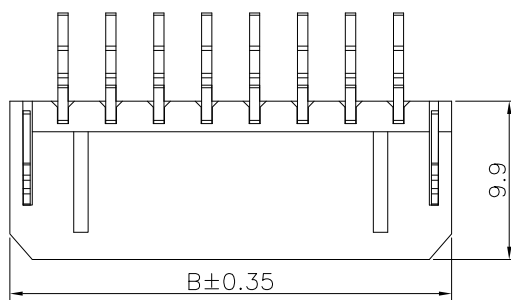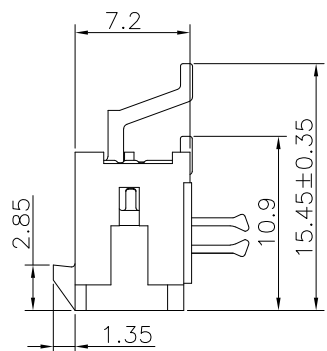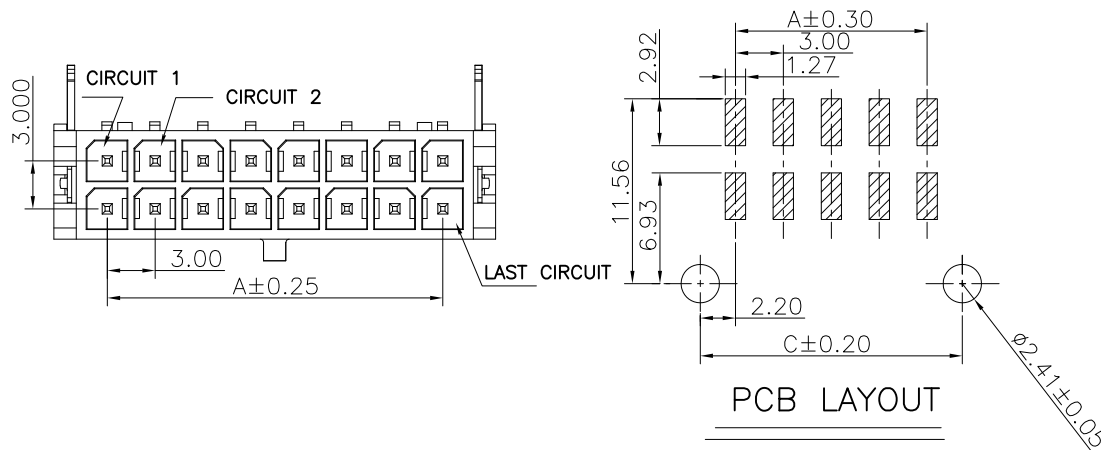

Pins	Dimensions(mm)		
	A	B	C
02	---	6.65	3.00
04	3.00	9.65	3.00
06	6.00	12.65	3.00
08	9.00	15.65	7.65
10	12.00	18.65	10.65
12	15.00	21.65	13.65
14	18.00	24.65	16.65
16	21.00	27.65	19.65
18	24.00	30.65	28.40
20	27.00	33.65	31.40
22	30.00	36.65	34.40
24	33.00	39.65	37.40

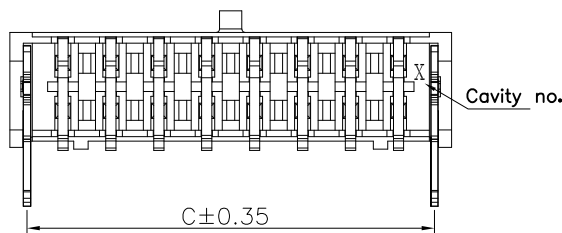

### Ordering Information

G WZD203 - XX XX F 002 C X B X  
 No. Of Pins Per Row SEE TABLE      Standard Plating 22=Matte Tin      Color 1=Black      Standard Packing D=Tape&Reel

**Greenconn**  
 Website: www.greenconn.com  
 E-mail: sales@greenconn.com

REV. A	UNIT. mm	SCALE. 1:1
--------	----------	------------

3RD.ANG PROJ.		GENERAL TOLERANCE	
PAGE. 1/1	[Symbol]	X.*±5.0'	X.±0.35
		.X.*±3.0'	.X±0.30
		.XX.*±2.0'	.XX±0.25
		.XXX.*±1.0'	.XXX±0.10

DESIGNED: 张汝楼	DATE: 2021.11.30
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. GWZD203-CF002CB
PART NO. GWZD203-XXXX F002CXBX

TITLE.  
 3.0mm 90° With harpoons  
 SMT DUAL ROW WAFER