




Product NO.

RHT-698-0233

REV	DESCRIPTION	DWN	DATE	APPROVEN
RL.0	First issue	Gavin	2021/09/07	JIM. KING

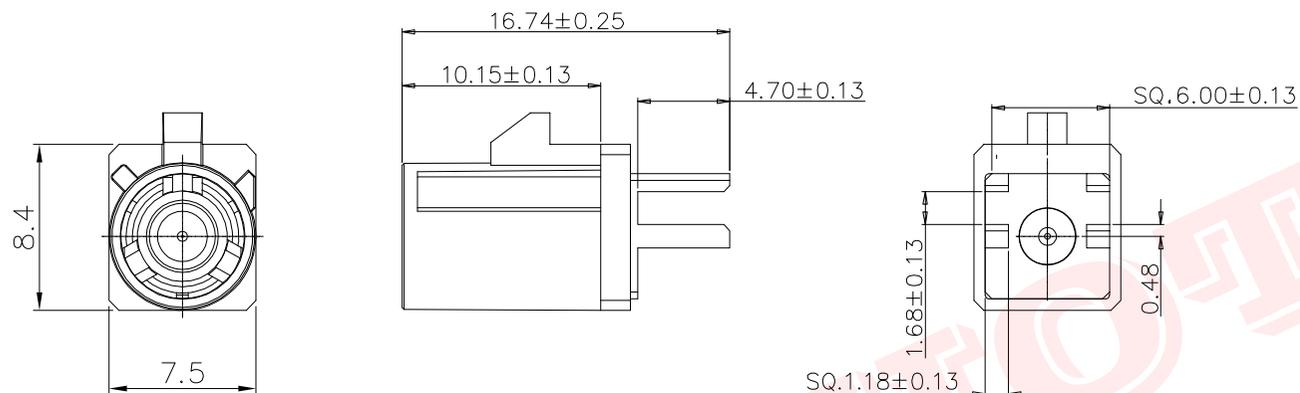

Electrical parameters:  
 Insulation resistance: 1000MΩ Min  
 Contact resistance: 30mΩ Max  
 Withstand voltage: 500V AC  
 Insertion/extraction force: ≤50N  
 Insertion times: 500 times  
 Operating temperature: -40°C~85°C

Coding	Graphics	Colour	Coding	Graphics	Colour
A		Jet Black	G		Blue Gray
B		White	H		Heather Violet
C		Signal Blue	I		Beige
D		Clart Violet	K		Curry
E		Leaf Green	L		Carmine Red
F		Nut Brown	M		Pastel Orange
Z		Water Blue	O		Pastel Green

NO	Description	Material	Finish	QTY
1	Insulator	PA66	White	1
2	PIN	BRASS	Gold	1
3	Body	Zinc alloy	Nickel	1
4	Plastic shell	PA66	right table	1

-TOLERANCES-  
UNLESS OTHERWISE  
SPECIFIED

UNLESS OTHERWISE SPECIFIED  
TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 8mm ± 0.10mm  
 8 - 30mm ± 0.15mm  
 30 - 120mm ± 0.20mm



RENHOTEC GROUP



Appd: JIM. KING

Check:

Draw: Gavin

PART DESCRIPTION:  
FAKRA MALE FOR PCB

P/N: RHT-698-0233

Date	Scale	Unit	Type	Page
2021.09.07	Free	MM	Z	1/1