






SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Brass

Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

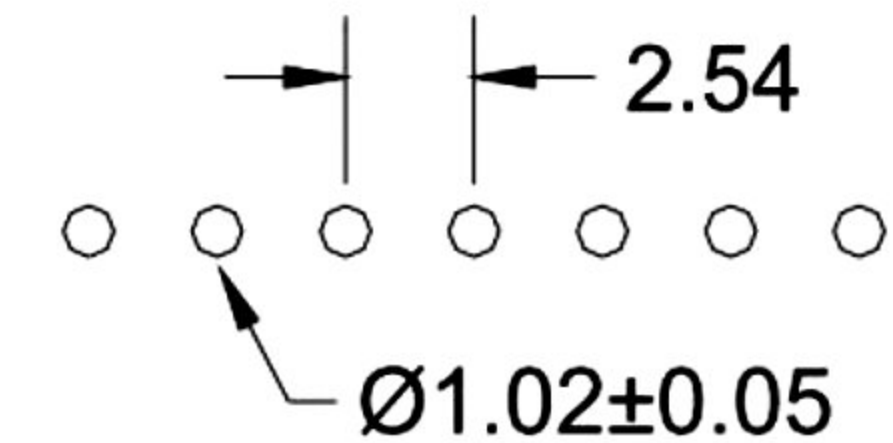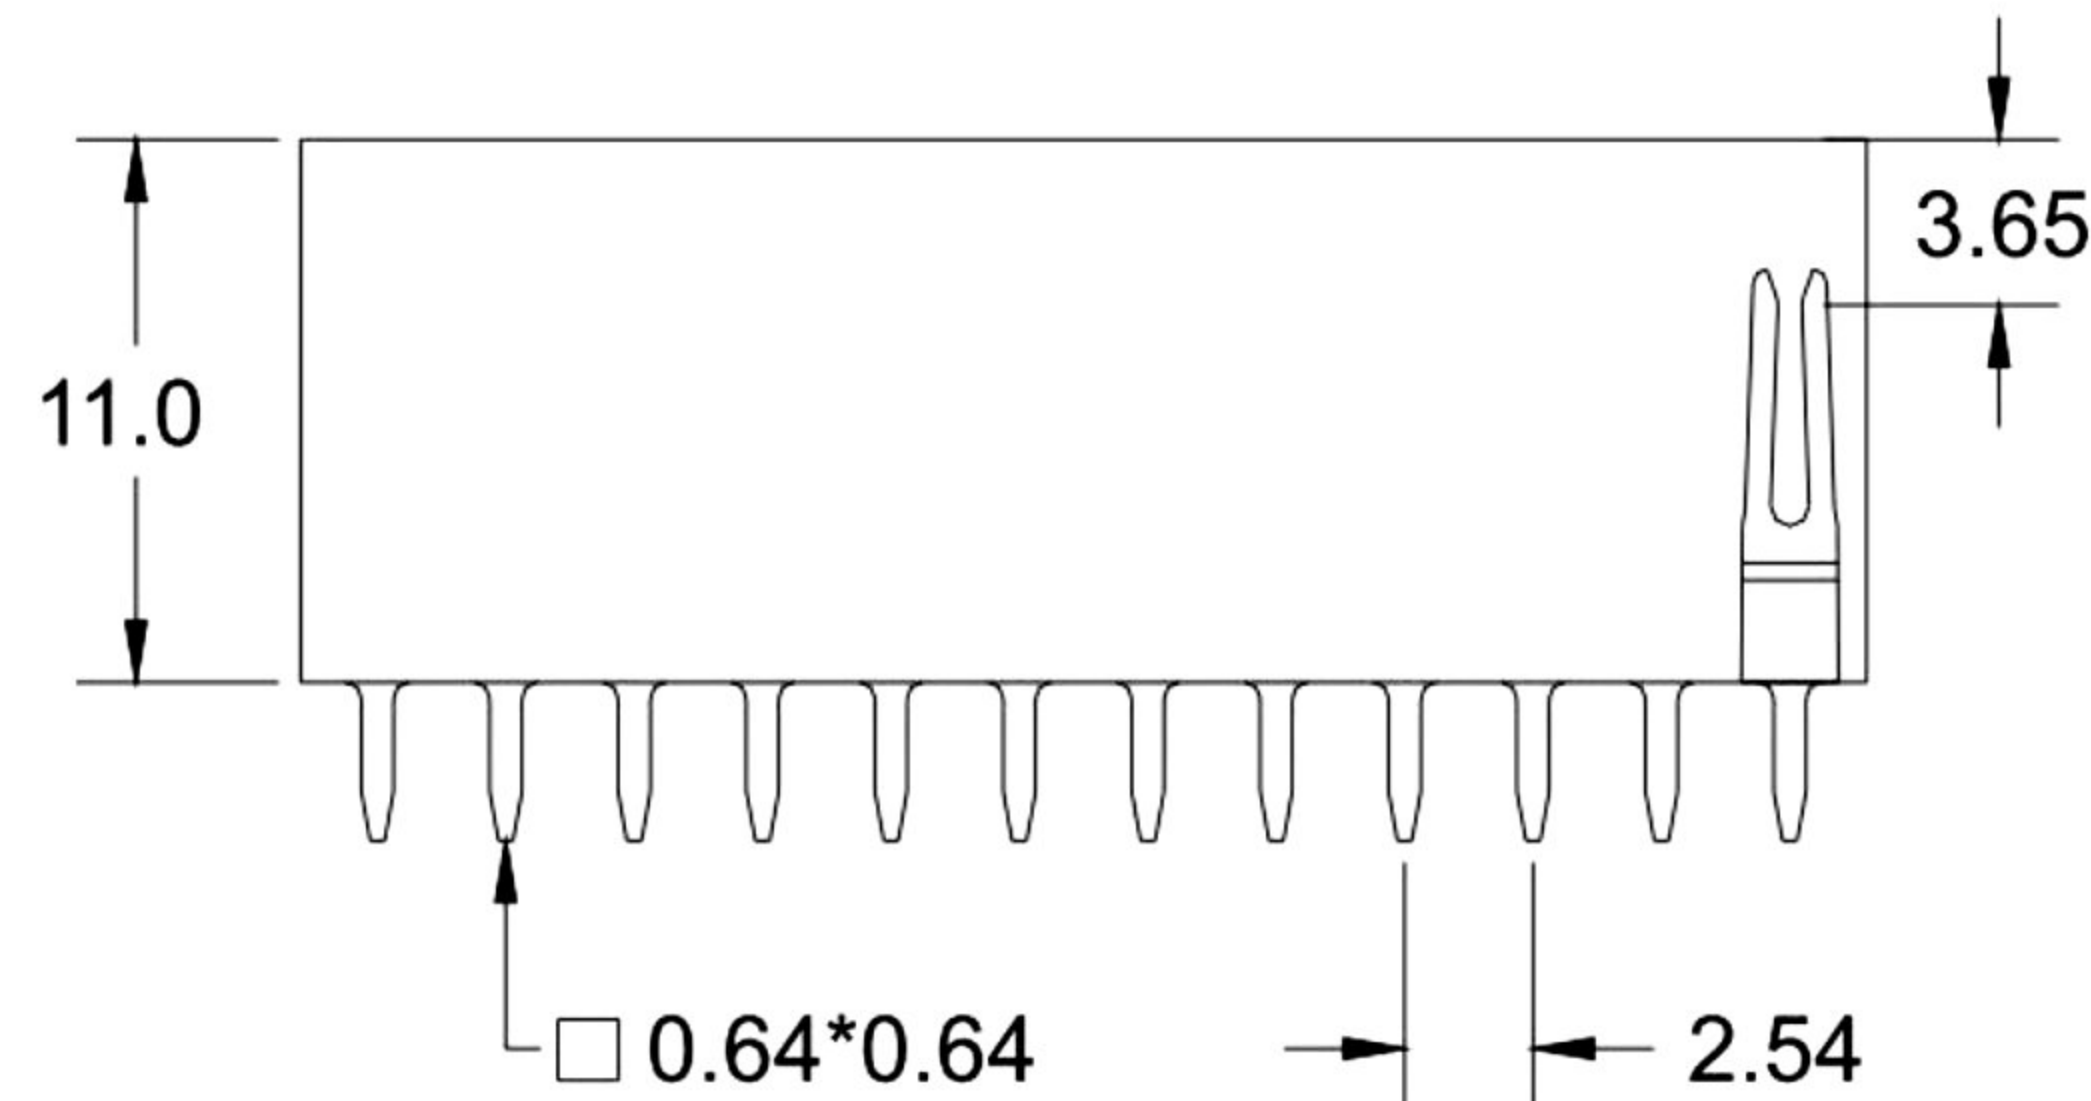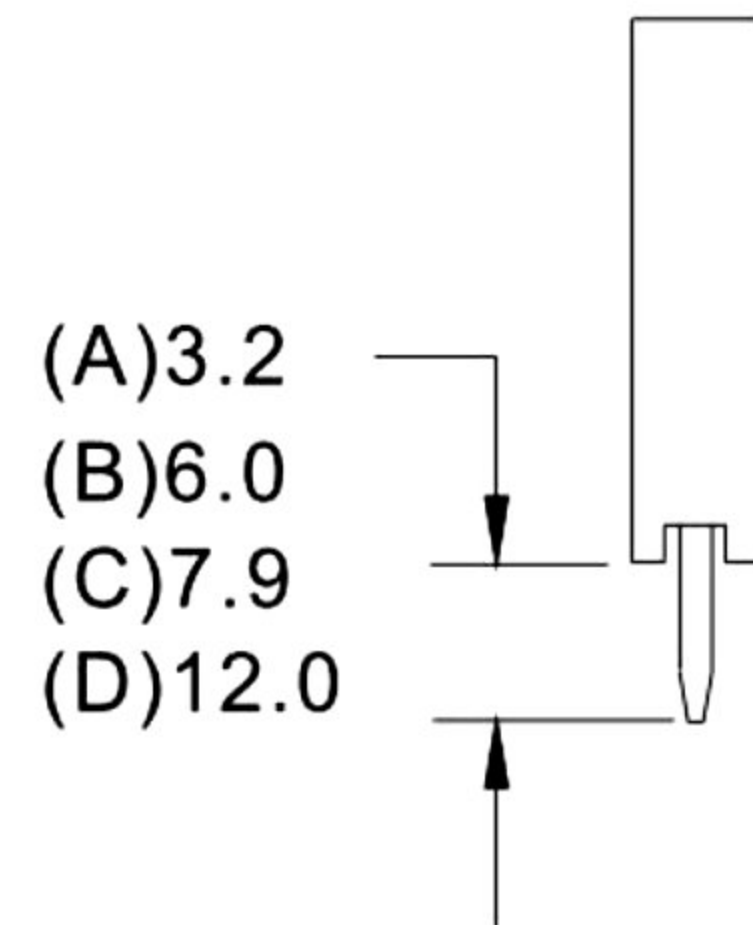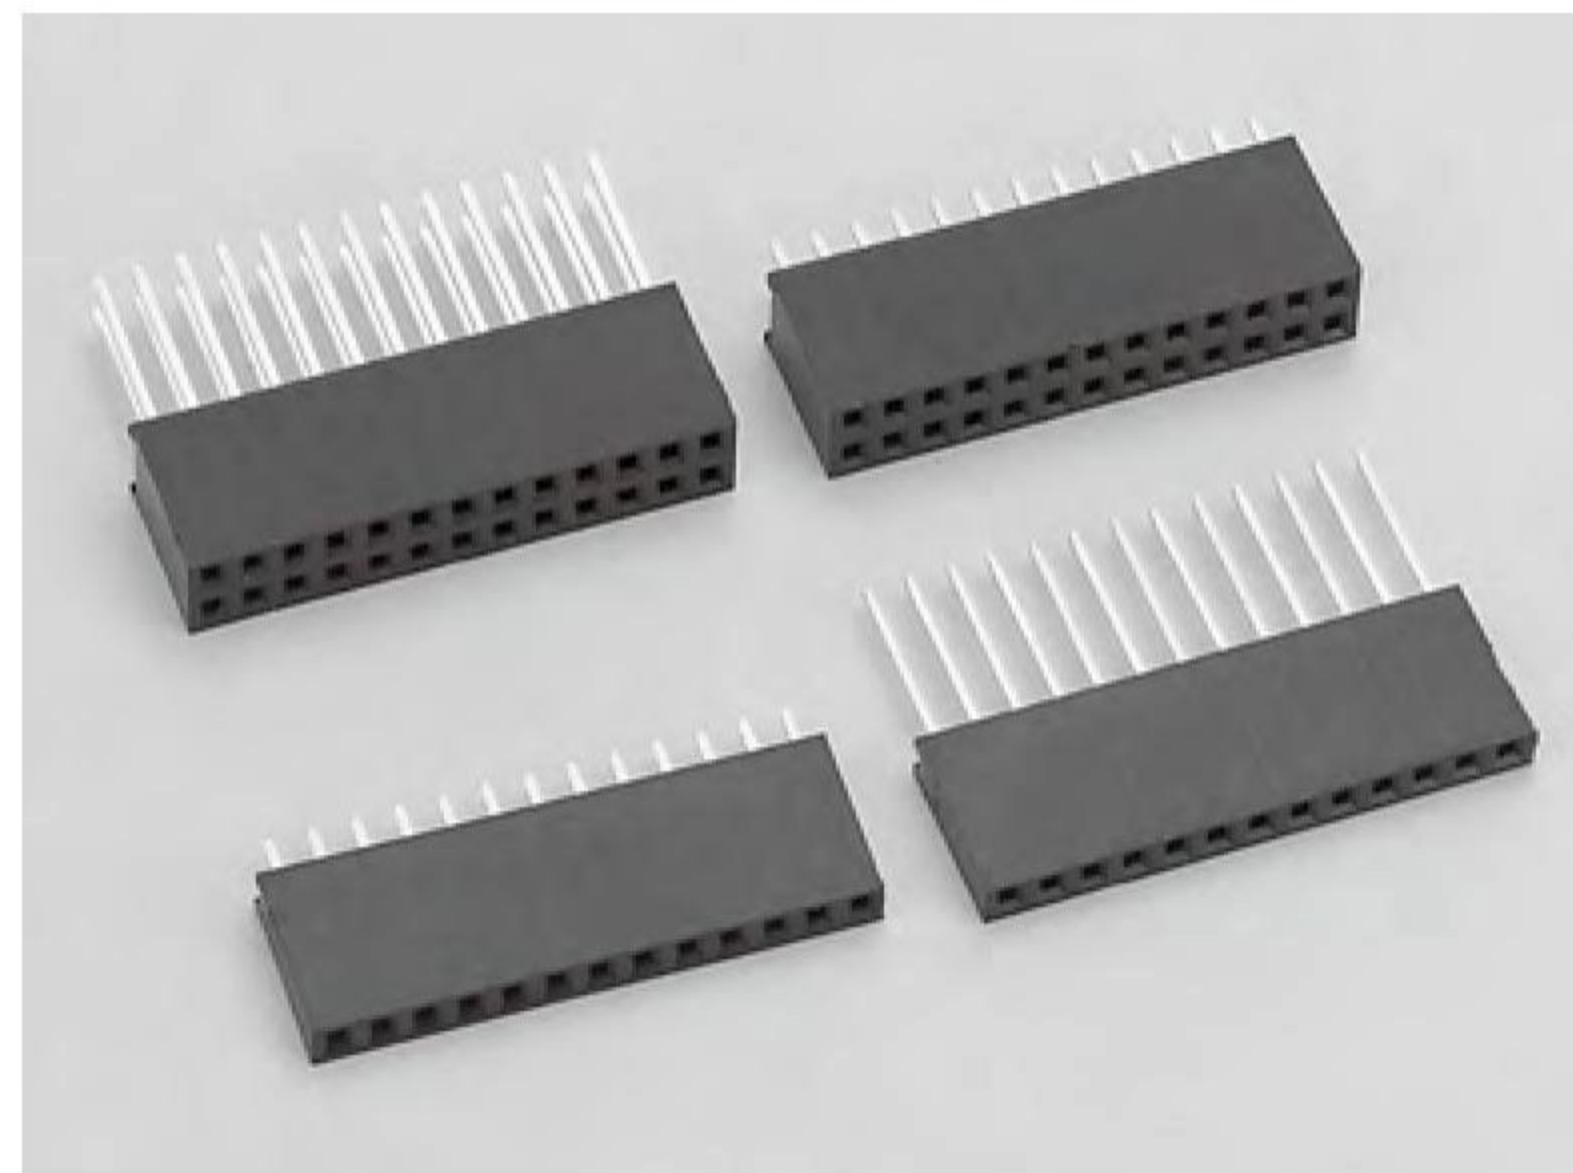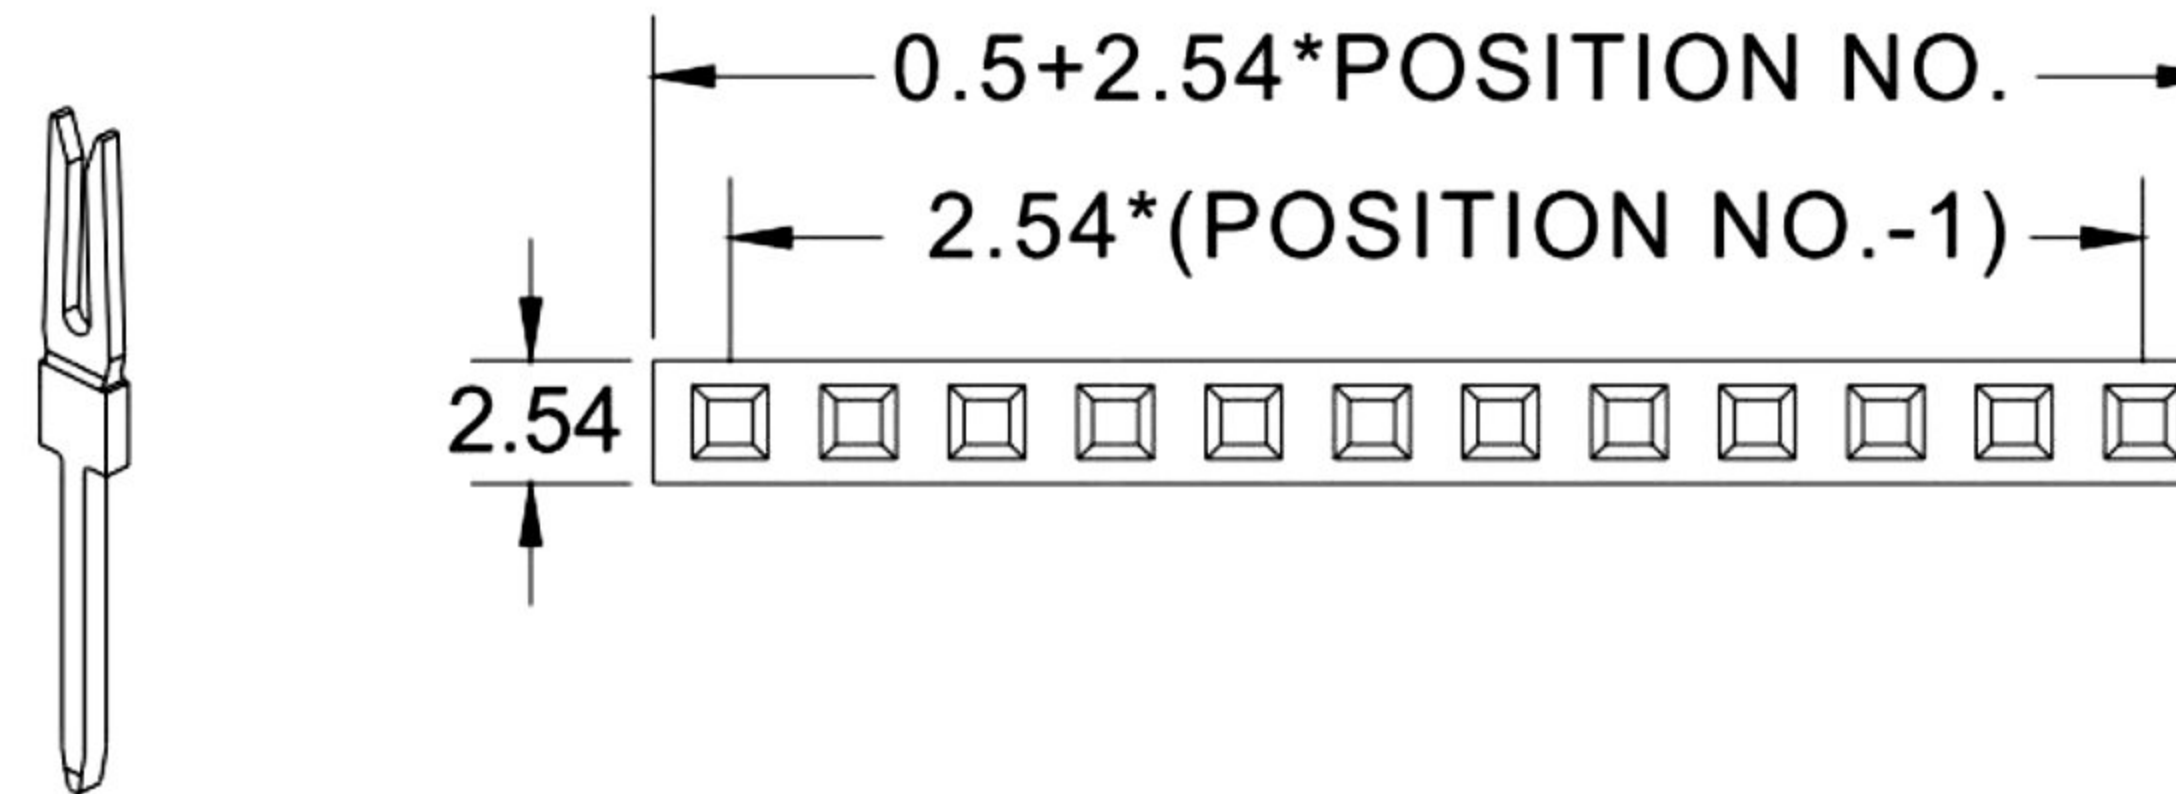

C **2822** — **04** **A** **S** **G** **H** **A** **0** **R**

- | | | | |
|---|---|-----------------------------------|---|
| 1. PRODUCTS:
C: Connector | 5. CONTACT TYPE:
S: Straight | 7. INSULATOR HEIGHT:
H: 11.0mm | 8. PIN LENGTH:
A: 3.2mm
B: 6.0mm
C: 7.9mm
D: 12.0mm |
| 2. SERIES NO.:
2822 | 6. CONTACT PLATING:
T: Tin
S: Selective Gold
G: Gold Flash | | 9. FILL IT WITH "0" |
| 3. CONTACT NO.:
02(1x2)-40(1x40)
04(2x2)-80(2x40) | | | 10. R: ROHS |
| 4. ROW TYPE:
A: Single Row
B: Dual Row | | | |

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .0 ±0.2 .00 ± ANG ±	PART NAME 品名 2.54mm FEMALE HEADER SINGLE ROW H:11mm 1XXXP STRAIGHT TYPE GOLD FLASH PLATING PIN LENGTH=XXmm ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C2822-XXASGHX0R
DATE 制表日 2018/09/27	PAGE 張數 1 OF 1	REV. 版次 C	