
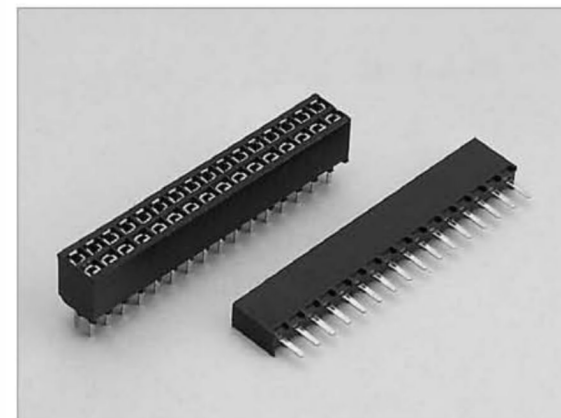


1 2 3 4 5 6 7 8

A

A

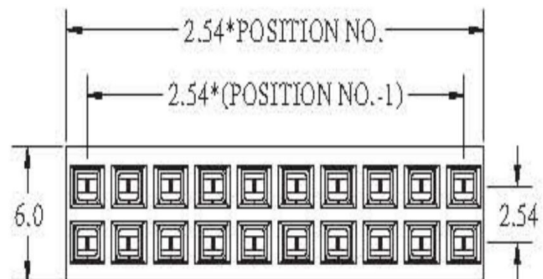

B


B

C

C

D

D

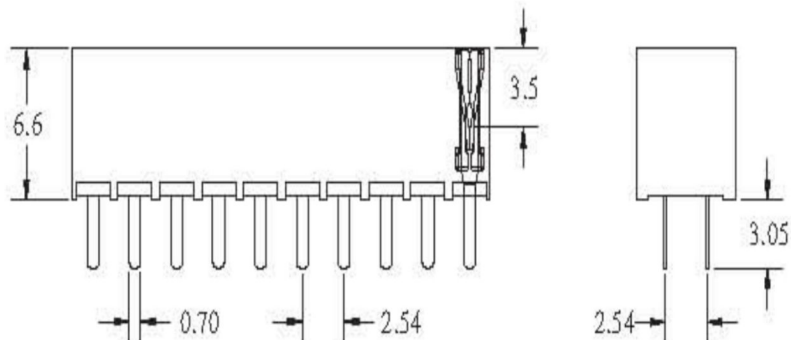

E


E

F

F

G

G



RECOMMENDED P.C.B LAYOUT

H

H

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40℃ to +105℃

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	Angel		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±
DWG. 製圖	Yumi		
DATE 制表日	2009/11/17	UNIT 單位	SCALE 比例
		M M	參考
		PAGE 張數	SIZE. 紙張尺寸
		1 OF 1	A 4
		REV. 版次	A
		PART NAME 品名	
		2.54mm FEMALE HEADER DUAL ROW H:6.6mm 2XXXP STRAIGHT TYPE LOW LEAD	
		PART NO. 料號	
		C2805-XXBSXH00R	

1 2 3 4 5 6 7 8