


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Contact Plating: Gold Flash(0.8U")
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be GP materials

RECOMMENDED P.C.B LAYOUT

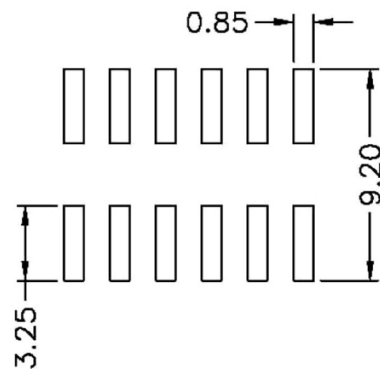

APPD. 核准 Angel DWG. 製圖 Yumi DATE 制表日 2011/02/15		RoHS Compliant HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		TOLERANCE 容許公差 X ± 5% Y ± 0.38 XX ± 1% XX ± 0.25 XXX ± 0.5% XXX ± 0.13 SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1 REV. 版次 A		PART NAME 品名 2.0mm FEMALE HEADER DUAL ROW H:5.0mm 2XXXP SMT SIDE TYPE GOLD PLATING BLACK INSULATOR W/O POLARIZATION TUBE PACKING ROHS LOW-LEAD PART NO. 料號 C6813-XXBDGHNTR	
---	--	--	--	---	--	--	--