






REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2022.01.13	罗嘉乐

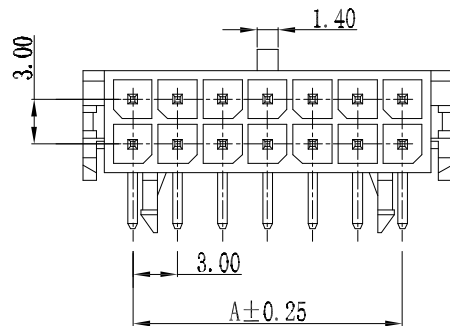

Specifications  
 Current Rating:5AMP  
 Voltage Rating:250V,AC DC  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:1500VAC  
 Contact Resistance:10mΩMax.  
 Operating Temperature:-40°C to +85°C  
 Materials  
 Contact Material:BRASS  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP  
 All materials must meet GREENCONN hazardous substances control standards.

Dimensions:

circuit	A	B	C
2*01	---	6.65	---
2*02	3.00	9.65	---
2*03	6.00	12.65	---
2*04	9.00	15.65	4.70
2*05	12.00	18.65	7.70
2*06	15.00	21.65	10.70
2*07	18.00	24.65	13.70
2*08	21.00	27.65	16.70
2*09	24.00	30.65	19.70
2*10	27.00	33.65	22.70
2*11	30.00	36.65	25.70
2*12	33.00	39.65	28.70

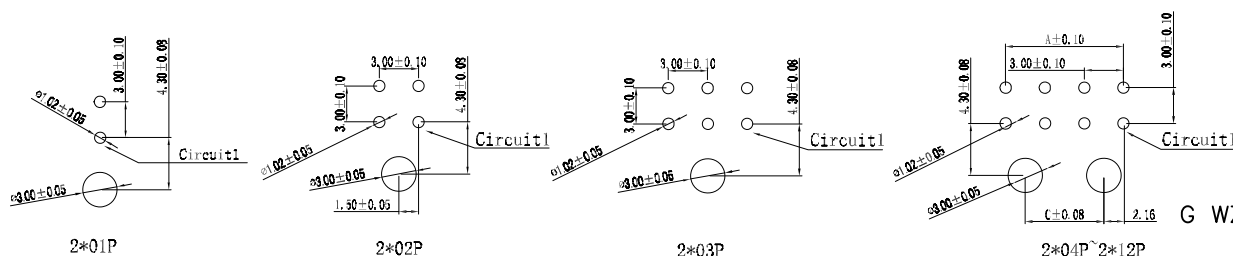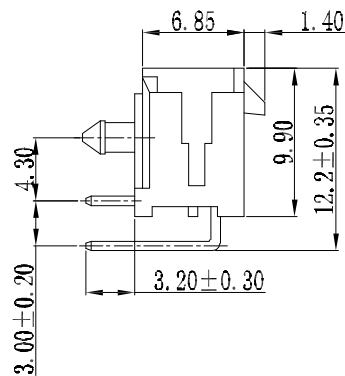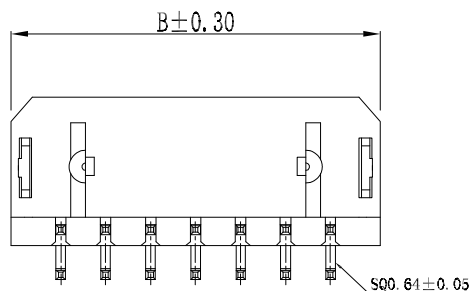

PCB LAYOUT

Ordering Information

G WZB214 - XX XX B 001 C X B X  
 No. of Pins per Row 01~12     Standard Plating 01=Tin     Color 1=Black     Standard Packing N=PE Bag



3RD.ANG PROJ.  
 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0'	X.±0.35
.X*±3.0'	.X±0.30
.XX*±2.0'	.XX±0.25
.XXX*±1.0'	.XXX±0.10

DESIGNED: 罗嘉乐

DATE: 2022.01.13

DWG. NO. GWZB214-CB001CB

TITLE.

CHECKED:

DATE:

PART NO. GWZB214-XXXX B001CXBX

3.0mm 90° WAFER

APPROVED:

DATE:

REV.	UNIT.	SCALE.
A	mm	1:1