




|             |                        |              |            |          |
|-------------|------------------------|--------------|------------|----------|
| Product NO. |                        | RHT-614-0234 |            |          |
| REV         | DESCRIPTION            | DWN          | DATE       | APPROVEN |
| R1.0        | First Issue            | Gavin        | 2022/09/15 | JIM.KING |
| R2.0        | Connector size changes | Gavin        | 2022/11/07 | JIM.KING |

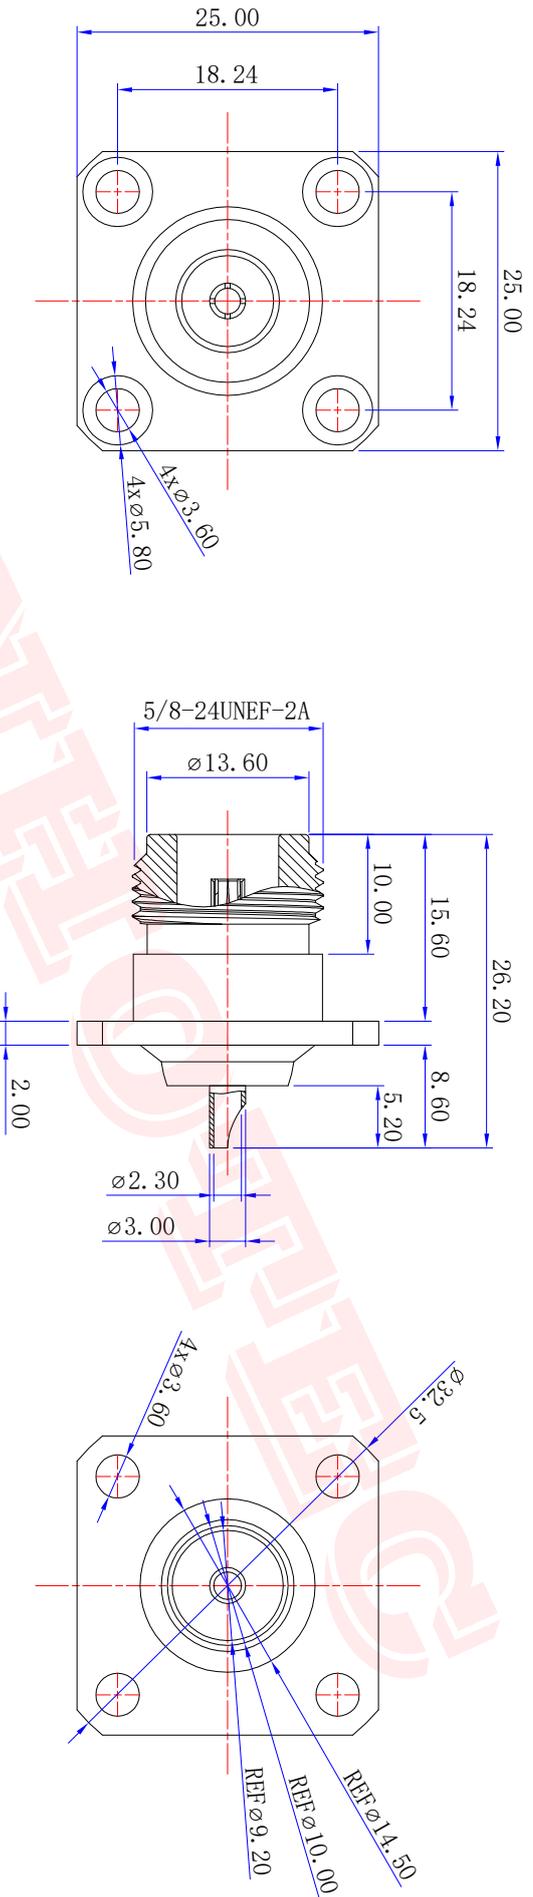

**Specifications**

Impedance: 50 Ohms  
 Frequency Range: 0-6G  
 VSWR: 1.5MAX  
 Working Voltage: 1000 VRMS (max at sea level)  
 Dielectric Withstanding Voltage: 1500 vrms (max at sea level)  
 Insulation Resistance: 5000 MOhms min  
 Durability Mating: 500 Cycles min  
 Temperature Range: -55°C To +155°C

|    |             |          |               |     |
|----|-------------|----------|---------------|-----|
| 3  | CENTER PIN  | BRASS    | GOLD PLATED   | 1   |
| 2  | INSUKATON   | PTFE     | NONE          | 1   |
| 1  | BODY        | BRASS    | NICKEL PLATED | 1   |
| NO | DESCRIPTION | MATERIAL | FINISH        | QTY |
| 1  |             |          |               |     |

-TOLERANCES-  
 UNLESS OTHERWISE SPECIFIED



PART DESCRIPTION:

N Female 4-Hole For Cable

Appd: JIM.KING

P/N:

RHT-614-0234

Check:

Date

Scale

Unit

Type

Page

Draw: Gavin

2022. 11. 07

Free

MM

Z

1/1

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES FOR MILLIMETERS ARE:

0.5 - 8mm ± 0.20mm  
 8 - 30mm ± 0.25mm  
 30 - 120mm ± 0.30mm