

Email; jack.lee@ramwaybat.com & lisocl2battery@gmail.com



ER 10450	
尺寸: 10.5x45.5mm	容量: 800mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 15mA	重量: 9.5 g



ER 14250	
尺寸: 14.5x25.4mm	容量: 1200mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 25mA	重量: 11 g



ER 14335	
尺寸: 14.5x33.5mm	容量: 1650mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 40mA	重量: 13 g



ER 14505	
尺寸: 14.5x50.5mm	容量: 2700mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 65mA	重量: 19 g



ER 17335	
尺寸: 17x33.5mm	容量: 2200mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 100mA	重量: 19 g



ER 17505	
尺寸: 17.0x50.5mm	容量: 3500mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 100mA	重量: 28 g



ER 18505	
尺寸: 18.5x50.5mm	容量: 4000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 130mA	重量: 32 g



ER 26500	
尺寸: 26.2x50.0mm	容量: 9000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 180mA	重量: 55 g



ER 261020	
尺寸: 26.2x102mm	容量: 17000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 200mA	重量: 100 g



ER 34615	
尺寸: 34.0x61.5mm	容量: 19000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 230mA	重量: 107 g



ER 341245	
尺寸: 34x124.5mm	容量: 35000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 400mA	重量: 200 g



ER 9V	
尺寸: 17x26.5x48.8mm	容量: 1200mAh
公称电压: 10.8V	终止电压: 6V
Max工作电流: 25mA	重量: 34 g

中倍率 High current



ER14250HC	
尺寸: 14.5x25.4mm	容量: 1200mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 50mA	重量: 11 g



ER14335HC	
尺寸: 14.5x33.5mm	容量: 1650mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 80mA	重量: 13 g



ER14505HC	
尺寸: 14.5x50.5mm	容量: 2700mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 100mA	重量: 19 g



ER17335HC	
尺寸: 17.0x33.5mm	容量: 2200mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 150mA	重量: 19 g



ER17505HC	
尺寸: 17.0x50.5mm	容量: 3500mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 150mA	重量: 28 g



ER18505HC	
尺寸: 18.5x50.5mm	容量: 4000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 150mA	重量: 32 g



ER26500HC	
尺寸: 26.2x50.0mm	容量: 9000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 300mA	重量: 55 g



ER34615HC	
尺寸: 34.0x61.5mm	容量: 19000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 460mA	重量: 107 g



ER14250M	
尺寸: 14.5x25.5mm	容量: 800mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 100mA	重量: 11 g



ER14335M	
尺寸: 14.5x33.5mm	容量: 1300mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 200mA	重量: 15 g



ER14505M	
尺寸: 14.5x50.5mm	容量: 2200mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 400mA	重量: 19 g



ER17335M	
尺寸: 17.0x33.5mm	容量: 1900mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 400mA	重量: 19 g



ER17505M	
尺寸: 17.0x50.5mm	容量: 3000mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 1000mA	重量: 28 g



ER18505M	
尺寸: 18.5x50.5mm	容量: 3500mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 1000mA	重量: 32 g



ER26500M	
尺寸: 26.2x50.0mm	容量: 6500mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 1500mA	重量: 55 g



ER34615M	
尺寸: 34.0x61.5mm	容量: 14500mAh
公称电压: 3.6V	终止电压: 2V
Max工作电流: 2000mA	重量: 110 g



CR 123A	
尺寸: 17.0x34.5mm	容量: 1600mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 1500mA	重量: 17 g



CR14250	
尺寸: 14.5x25.5mm	容量: 600mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 500mA	重量: 11 g



CR14335	
尺寸: 14.5x33.5mm	容量: 950mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 1000mA	重量: 14 g



CR 14505	
尺寸: 14.5x50.5mm	容量: 1500mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 1500mA	重量: 21 g



CR17450	
尺寸: 17.0x45.0mm	容量: 2200mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 1500mA	重量: 22 g



CR17505	
尺寸: 17.0x50.5mm	容量: 2500mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 1500mA	重量: 30 g



CR 18505	
尺寸: 18.5x50.5mm	容量: 3000mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 2000mA	重量: 35 g



CR26500	
尺寸: 26.0x50.5mm	容量: 6000mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 2000mA	重量: 62 g



CR34615	
尺寸: 34.0x61.5mm	容量: 12000mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 2000mA	重量: 125 g



CR2	
尺寸: 15.5x27.0mm	容量: 800mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 1000mA	重量: 13 g



CR-P2	
尺寸: 36x19.5x35mm	容量: 1600mAh
公称电压: 6V	终止电压: 4V
Max工作电流: 1500mA	重量: 42 g



DX10280	
尺寸: 10.5x28.0mm	容量: 450mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 20mA	重量: 55 g



DX10450	
尺寸: 10.5x45.5mm	容量: 700mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 20mA	重量: 9.5 g



DX14250	
尺寸: 14.5x25.4mm	容量: 1100mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 60mA	重量: 11 g



DX14505	
尺寸: 14.5x50.5mm	容量: 2400mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 100mA	重量: 19 g



DX18505	
尺寸: 17.0x50.5mm	容量: 3800mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 160mA	重量: 32 g



DX26500	
尺寸: 26.2x50.0mm	容量: 8100mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 220mA	重量: 55 g



DX34615	
尺寸: 34.0x61.5mm	容量: 16600mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 300mA	重量: 107 g



DX1425M	
尺寸: 14.5x25.5mm	容量: 750mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 150mA	重量: 11 g



DX14505M	
尺寸: 14.5x50.5mm	容量: 2000mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 400mA	重量: 19 g



DX18505M	
尺寸: 18.5x50.5mm	容量: 3200mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 1000mA	重量: 32 g



DX26500M	
尺寸: 26.2x50.0mm	容量: 6000mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 1500mA	重量: 55 g



DX34615M	
尺寸: 34.0x61.5mm	容量: 13500mAh
公称电压: 3.9V	终止电压: 2V
Max工作电流: 2000mA	重量: 110 g

型号可定制



ER 18700	
尺寸: 18.5x70.0mm	容量: 2500mAh
公称电压: 2.9V	终止电压: 2V
Max工作电流: 1400mA	重量: 33 g



ER26500	
尺寸: 14.5x25.4mm	容量: 3700mAh
公称电压: 2.9V	终止电压: 2V
Max工作电流: 2000mA	重量: 52 g



ER26600	
尺寸: 26.5x60.0mm	容量: 5000mAh
公称电压: 2.9V	终止电压: 2V
Max工作电流: 2500mA	重量: 62 g



ER 34615	
尺寸: 34.2x61.5mm	容量: 7800mAh
公称电压: 2.9V	终止电压: 2V
Max工作电流: 4000mA	重量: 92 g

## 功率型 Spiral type



CP072922	
尺寸: 22.5x29.5x0.75mm	容量: 27mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 5mA	重量: 0.6 g



CP153030	
尺寸: 30.5x30.5x1.6mm	容量: 150mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 20mA	重量: 1.8 g



CP502440	
尺寸: 42x25x5.2mm	容量: 1200mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 400mA	重量: 7.8 g



CP1005060	
尺寸: 52x51x10.2mm	容量: 10000mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 2000mA	重量: 42 g



CP7839109	
尺寸: 109x39x8.0mm	容量: 10000mAh
公称电压: 3V	终止电压: 2V
Max工作电流: 3000mA	重量: 65 g

### 其他型号参数

型号	最大外形尺寸 (厚*宽*高) mm	最大连续电流 (mA)	最大脉冲电流 (mA)	电池重量 (g)	标称容量 (mAh)
CP7839109	8.0*39*109	3000	5000	65	10000
CP1005050	10.2*51*52	2000	4000	42	6000
CP1003742	10.2*39*44	1500	3000	26	3800
CP505050	5.2*52*52	1500	2000	22	3000
CP405060	4.2*52*62	1500	2000	18	2800
CP603550	6.2*37*52	1000	1200	17	2400
CP603448	6.1*35*49	1000	1200	17	2300
CP405050	4.2*52*52	1000	1200	17	2300
CP603742	6.2*39*44	1000	1200	16.5	2100
CP952434	9.7*26*36	600	1000	11	1800
CP503742	5.2*39*44	600	1000	13	1800
CP305050	3.2*52*52	600	1000	12	1800
CP702440	7.2*26*42	500	1000	11	1600
CP652440	6.7*26*42	500	1000	10	1500
CP343550	3.6*37*52	400	800	9.7	1400
CP502440	5.2*25*42	300	500	7.8	1200
CP9V	17*26.5*48.5	300	500	37	1200
CP752425	7.7*26*27	300	500	7.8	1100
CP224147	2.4*43*49	200	400	7	900
CP332544	3.3*27*46	200	400	5.5	850
CP702025	7.2*21*27	200	400	5.2	800
CP502525	5.2*27*27	200	400	5.5	550
CP451830	4.7*19*31	100	150	4.5	450
CP471725	4.8*18*25	100	150	3.7	350
CP105050	1.05*50.5*50.5	30	50	3.6	320
CP084248	0.85*42.5*48.5	20	40	2.4	200
CP153030	1.6*30.5*30.5	20	40	1.8	150
CP301020	3.2*12*22	30	60	3	130
CP072922	0.75*29.5*22.5	5	10	0.6	27

## 混合图层电容 Hybrid Capacitor



RHC1520	
尺寸: 15.0x20.8mm	容量: 充电至 3.67V 200As 充电至 3.95V 380As
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 500mA	重量: 8.8 g



RHC1530	
尺寸: 15.0x27.5mm	容量: 充电至 3.67V 280As 充电至 3.95V 500As
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 500mA	重量: 11.8 g



RHC1550	
尺寸: 15.0x51.0mm	容量: 充电至 3.67V 650As 充电至 3.95V 1000As
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 1500mA	重量: 21 g

## 锂离子超级电容 Lithium Ion Capacitor



RY LIC0813	
尺寸: 8.5x13.5mm	容量: 20F
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 100mA	重量: 1.5 g



RY LIC0820	
尺寸: 8.5x20.5mm	容量: 40F
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 200mA	重量: 2 g



RY LIC1020	
尺寸: 10.5x20.5mm	容量: 80F
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 250mA	重量: 3 g



RY LIC1030	
尺寸: 10.5x30.5mm	容量: 120F
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 500mA	重量: 6 g



RY LIC1313	
尺寸: 13.0x13.5mm	容量: 70F
公称电压: 4V	终止电压: 2.5V
Max工作电流: 250mA	重量: 3 g



RY LIC1320	
尺寸: 13.5x20.5mm	容量: 120F
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 500mA	重量: 5 g




RY LIC1620	
尺寸: 16.5x20.5mm	容量: 250F
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 750mA	重量: 8 g



RY LIC1840	
尺寸: 18.5x40.5mm	容量: 750F
公称电压: 4.2V	终止电压: 2.5V
Max工作电流: 3000mA	重量: 20 g

## ER+RHC 组合

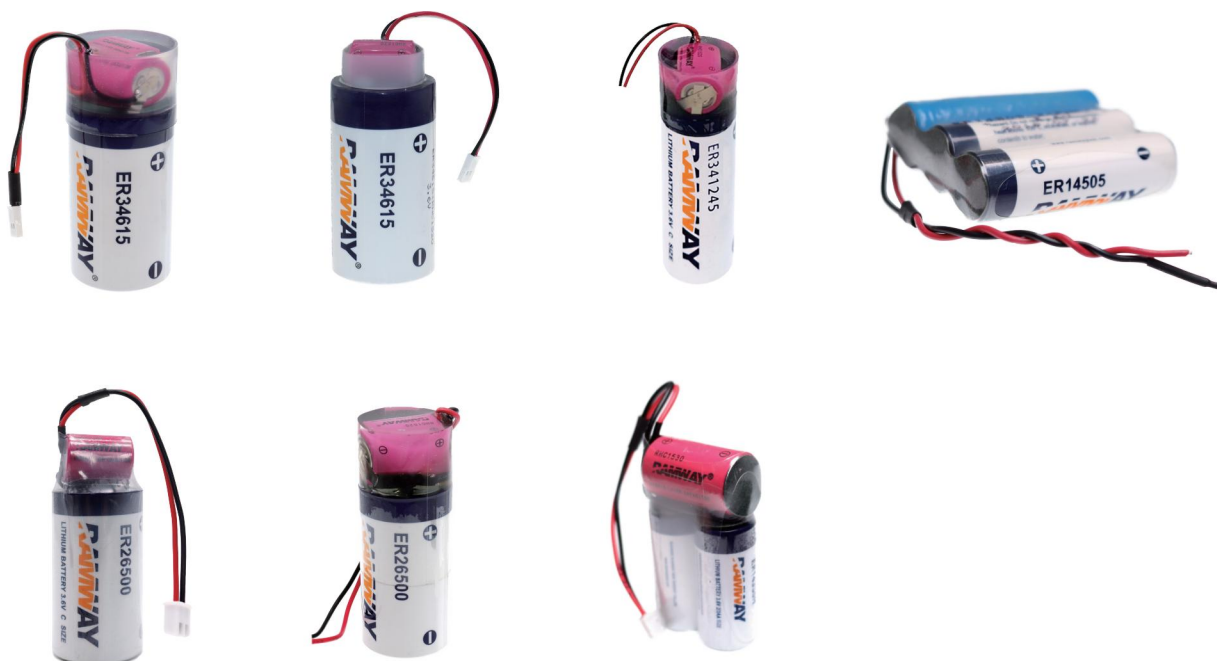

## ER+LIC 组合



## 电表电池应用 Electricity Meter



## 水表电池应用 Water Meter

