




ELECTRICAL SPECIFICATIONS@25°C UNLESS OTHERWISE NOTED:

NOTES:

1. MATERIAL
 - 1.1 HOUSING:HIGH THERMAL PLASTIC,BLACK,UL94 V-0
 - 1.2 CONTACT:COPPER ALLOY,CONTACT AREA:PLATING G/F, SOLDER AREA:PLATING SN 80U"MIN.
 - 1.3 SHELL:COPPER ALLOY,PLATING NI 30U"MIN.
 - 1.4 LED:GREEN AND YELLOW
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 1.5A MAX.
 - 2.2 VOLTAGE RATING :150V AC MIN. (RMS)
 - 2.3 WITHSTANDING VOLTAGE: 1000V AC FOR 1 MINUTE
 - 2.4 INSULATION RESISTANCE: 500MΩ MIN.
 - 2.5 CONTACT RESISTANCE: 40mΩ MAX.
3. ENVIRONMENTAL:

OPERATING TEMPERATURE: -40°C TO +85°C

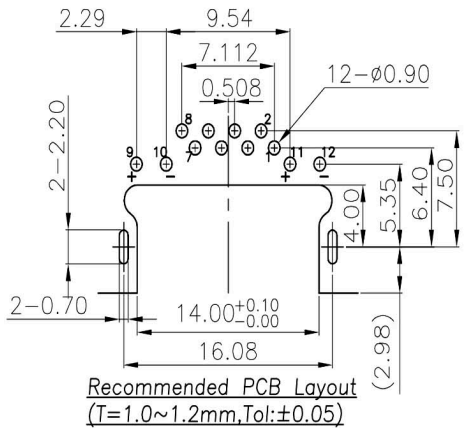

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE .X±0.38	PART NAME 品名 SIDE ENTRY MODULAR JACK OFFSET TYPE 8P8C DIP TYPE WITH SHIELDED WITH LED (LEFT:YELLOW/RIGHT:GREEN) BLACK COLOR TRAY PACKING ROHS
DWG. 製圖	Betty	SCALE 比例 參考 .XX±0.25	PART NO. C0069-88YX02B0R
DATE 制表日	2021/12/20	UNIT 單位 MM	料號
		PAGE 張數 1 OF 1	
		REV. 版次 B	