



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

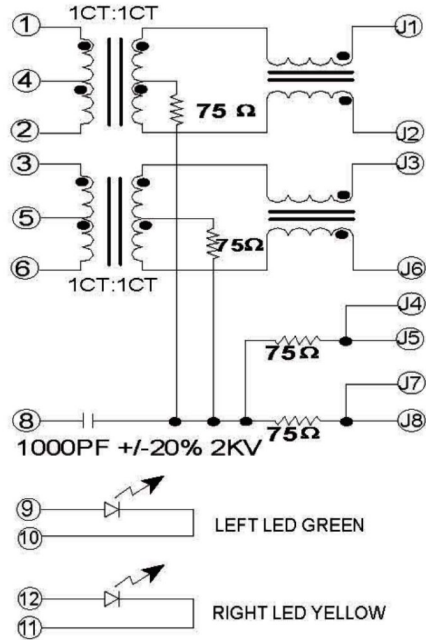

Insertion Loss: 1-100MHZ -1.0dB MAX
Return Loss: 1-30MHZ -16.0dB MIN
 30-60MHZ -14.0dB MIN
 60-80MHZ -10.0dB MIN
Crosstalk: 1-30MHZ -40.0dB MIN
 30-60MHZ -35.0dB MIN
 60-100MHZ -30.0dB MIN
CMRR: 1-100MHZ -35.0dB MIN
Hipot: 1500V AC 6S 1mA
OCL: 350uH MIN @ 100KHZ 100mV 8mA DC
DCR: J1-J4=J2-J5=J3-J7=
 J6-J8=J2-J3=135-165ohms

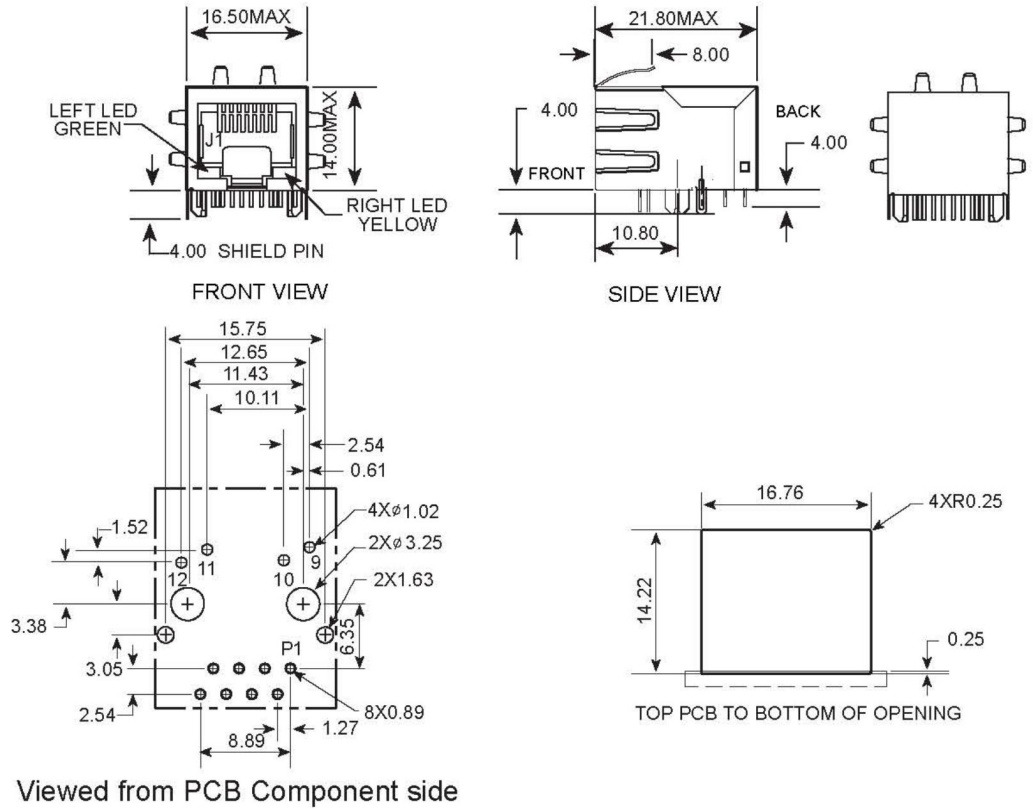

| | | | |
|------------------------|-------------------|---|--|
| RoHS Compliant | | HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. | |
| APPD. 核准 Angel | SCALE 比例 参考 | TOLERANCE 容許公差 .0 ± .00 ±0.25 .000 ±0.13 | PART NAME 品名 RJ45 TRANSFORMER PCB JACK W/FULLY SHIELDED SELECTIVE GOLD 6U" BLACK W/TABS W/ LED (GREEN/YELLOW) ROHS LOW-LEAD |
| DWG. 製圖 Yumi | UNIT 單位 MM | SIZE 紙張尺寸 A 4 | PART NO. 料號 C0072-88AYQB05R |
| DATE 制表日 2010/10/14 | PAGE 張數 1 OF 1 | REV. 版次 A | |