

RoHS
Compliant



HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
Betty
DWG.
製圖
DATE 制表日
2022/07/26

SCALE
比例 參考
UNIT
單位 M M
PAGE
張數 1 OF 2

TOLERANCE
容許公差
.0 ± 0.30
.00 ± 0.20
ANG. ± 3°
SIZE.
紙張尺寸 A 4
REV.
版次 A

PART NAME 品名
RJ45 JACK STACKED 2X1PORT 8P8C W/LED
(LEFT:YELLOW/RIGHT:GREEN) 3 TAB BLACK
INSULATOR CONTACT AREA:GOLD 50u"
OTHER AREA:GOLD FLASH PLATING TRAY PACKING
PART NO.
料號 C0074-ABYM1B003R

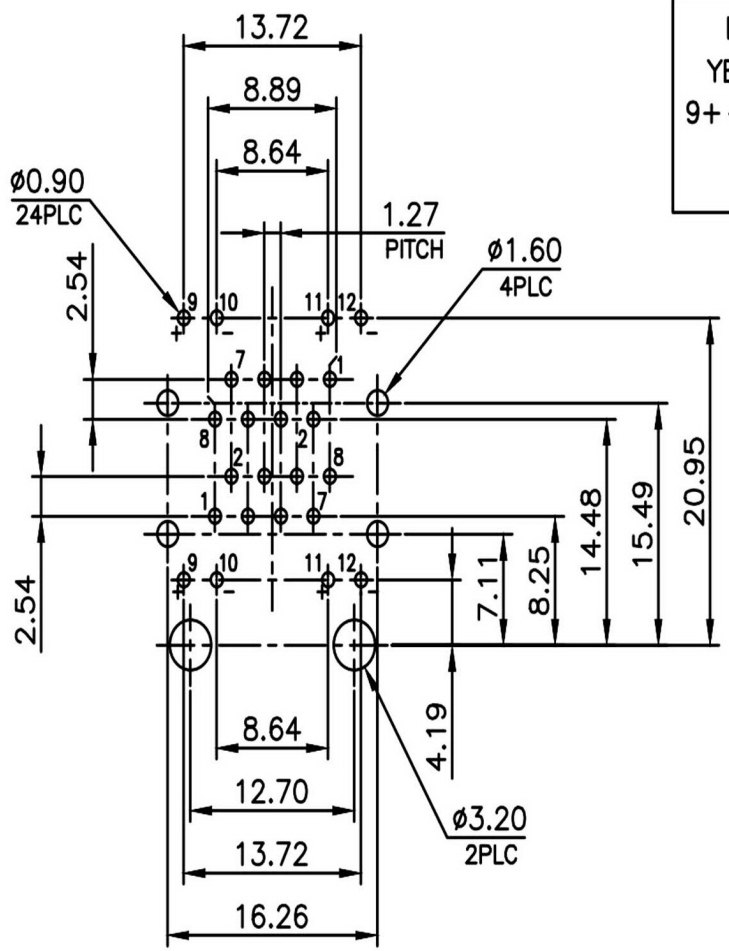

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:
 - 1.1 BOTTOM HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
 - 1.2 BOTTOM INSERT HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
 - 1.3 TOP HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
 - 1.4 TOP INSERT HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
 - 1.5 CONTACTS: PHOSPHOR BRONZE.
 - 1.6 LED: STEEL.
 - 1.7 SHELL: BRASS.
2. FINISH:
 - 2.1 CONTACTS: 1.27 μ m [50 μ "] GOLD PLATED ON CONTACT AREA, GOLD FLASH PLATED ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED 1.27 μ m [50 μ "] MIN. NICKEL
 - 2.2 LED SOLDER TAIL: 2.032 μ m [80 μ "] MIN. TIN PLATED.
 - 2.3 SHELL: 0.508 μ m [20 μ "] MIN. NICKEL PLATED.

RECOMMENDED PCB LAYOUT
 PCB THICKNESS: 1.6mm
 TOLERANCE: ± 0.05 mm (TOP VIEW)

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 RJ45 JACK STACKED 2X1PORT 8P8C W/LED (LEFT:YELLOW/RIGHT:GREEN) 3 TAB BLACK INSULATOR CONTACT AREA:GOLD 50u" OTHER AREA:GOLD FLASH PLATING TRAY PACKING
DWG. 製圖 Betty	SCALE 比例 參考	UNIT 單位 MM	PART NO. C0074-ABYM1B003R
DATE 制表日 2022/07/26	PAGE 張數 2 OF 2	SIZE 紙張尺寸 A 4	料號