


REV	CONTENT	CHK	DATE
VO.0	CONTENT	LZW	24.05.28

NOTES:

1. Material: PA66 UL94V-0;
2. The surface shall not have material flowers, shrinkage, deformation, lack of material, distortion, color and other adverse phenomena;
3. Ambient temperature: -40~+105℃
4. "★" is the key quality control point.

GTKT02 - 22.5 - X X - 02

- ① Series NO. ③ 1 Single Pitch
 ② Pitch
 ④ Color: 1 Grey
 2 Blue
 3 Black
 4 Green
 5 Orange
 6 Red
 7 Transparent
 8 Yellow
 9 White
 ⑤ Customer Request: 02--Customized

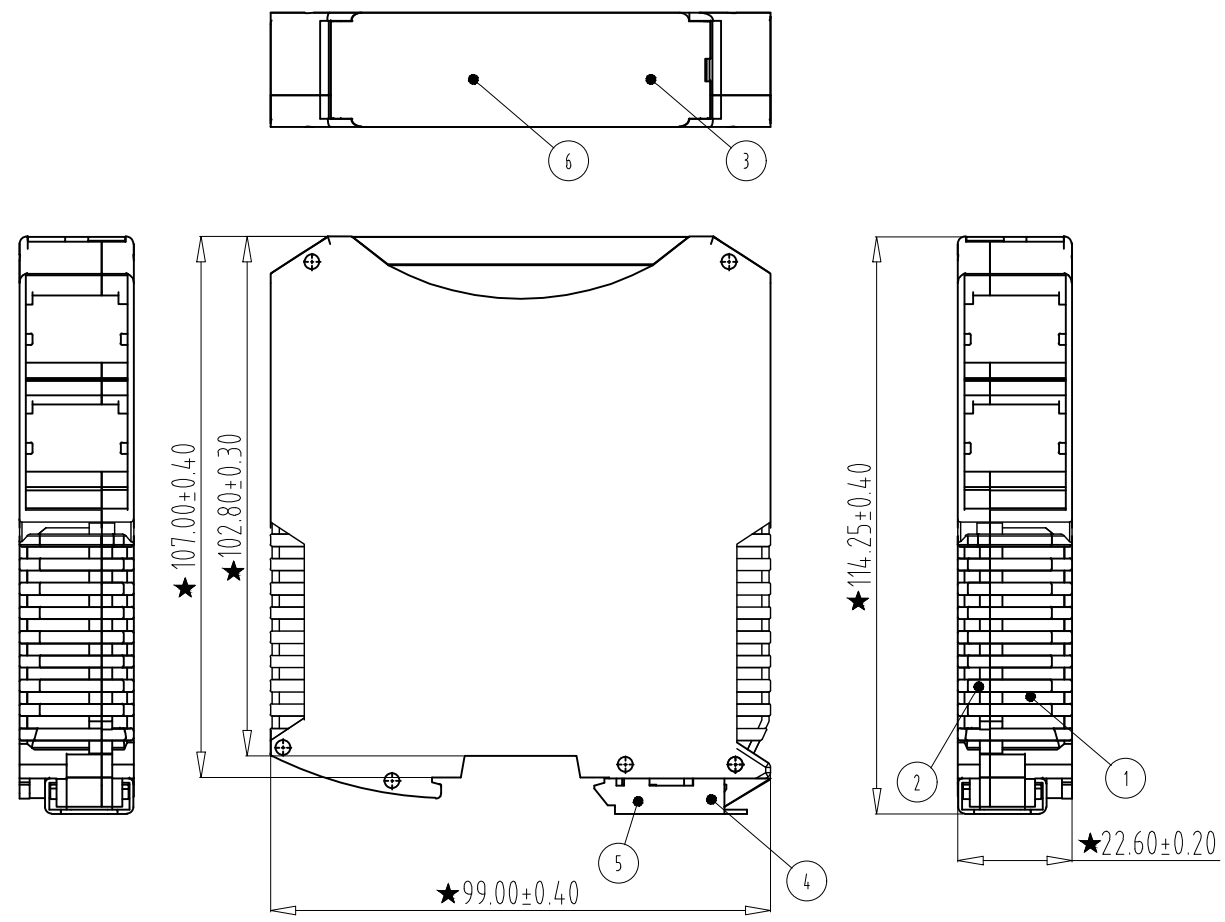

6	SPRING	XXXXXX	1	Stainless steel	SEE NOTE
5	FOOT CATCH	XXXXXX	1	STEEL	Zn Plated
4	HINGED COVER	XXXXXX	1	PC UL94V-2	SEE NOTE
3	FRONT PLATE	XXXXXX	1	PA66 UL94V-0	SEE NOTE
2	HOUSING-LEFT	XXXXXX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING-RIGTT	XXXXXX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	24.05.28	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	GTKT02-22.5-XX-02
				DWGNO.	XXXX

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥	≡	-	//								
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	over 100	over 150	10	all	to 100	to 150	0.2	0.3	0.5
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.3	0.2	0.3	0.2	0.3	0.5