




Cir-cuits	Dimension (mm)	
	L1	L2
2x2	2.00	4.00
2x3	4.00	6.00
2x4	6.00	8.00
2x5	8.00	10.00
2x6	10.00	12.00
2x7	12.00	14.00
2x8	14.00	16.00
2x9	16.00	18.00
2x10	18.00	20.00
2x11	20.00	22.00
2x12	22.00	24.00
2x13	24.00	26.00
2x14	26.00	28.00
2x15	28.00	30.00
2x16	30.00	32.00
2x17	32.00	34.00
2x18	34.00	36.00
2x19	36.00	38.00
2x20	38.00	40.00
2x21	40.00	42.00
2x22	42.00	44.00
2x23	44.00	46.00
2x24	46.00	48.00
2x25	48.00	50.00
2x26	50.00	52.00
2x27	52.00	54.00
2x28	54.00	56.00
2x29	56.00	58.00
2x30	58.00	60.00
2x31	60.00	62.00
2x32	62.00	64.00
2x33	64.00	66.00
2x34	66.00	68.00
2x35	68.00	70.00
2x36	70.00	72.00
2x37	72.00	74.00
2x38	74.00	76.00
2x39	76.00	78.00
2x40	78.00	80.00

SPECIFICATION

Current Rating: 1Amp
Insulator Resistance: 5000 Megohms Min.
Contact Resistance: 20 Milliohms Max.
Dielectric Withstanding: AC 500V
Operating Temperature: -40°C ~ +105°C
Max Processing Temp: 230°C For 60 Seconds
260°C For 10 Seconds

Insulator Material: Polysphor, UL 94V-0
Standard: Nylon-6T

Contact Material: Phosphor Bronze.
Finish: Gold Flash All Over

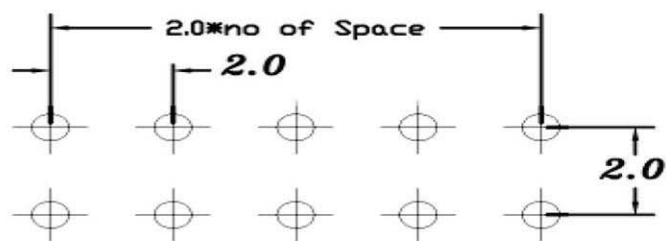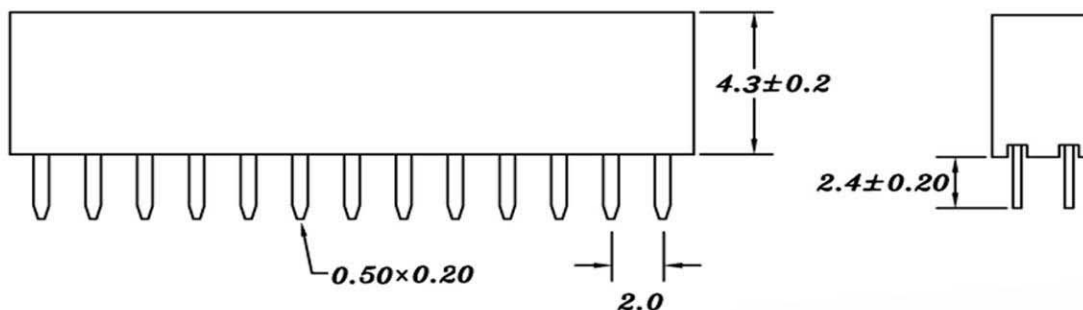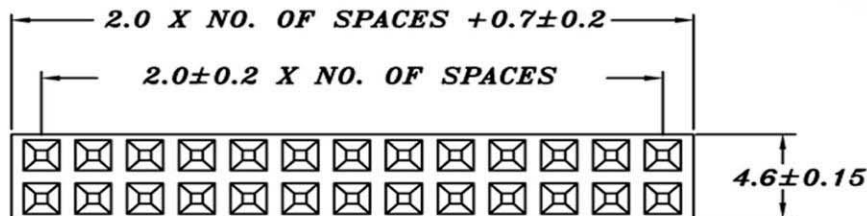

Pc Board Layout

<table border="1"> <tr><td>APPD. 核准</td><td rowspan="2"></td><td colspan="2">TOLERANCE 零件公差</td><td rowspan="2">PART NAME 品名</td></tr> <tr><td>DWG. 製圖</td><td>SCALE 比例</td><td>ANG. ±</td><td>2.0mm FEMALE HEADER DUAL ROW H:4.3mm W:4.6mm 2X??P STRAIGHT TYPE GOLD PLATING BLACK INSULATOR ROHS</td></tr> <tr><td>DATE 制表日</td><td>UNIT 單位</td><td>SIZE. 紙張尺寸</td><td>A4</td><td rowspan="2">PART NO.</td></tr> <tr><td>2012/9/3</td><td>M M</td><td>REV. 版次</td><td>B</td><td>C6801-XXBSGD00R</td></tr> <tr><td colspan="2">PAGE 張數</td><td colspan="2">1 OF 1</td><td>料號</td></tr> </table>		APPD. 核准		TOLERANCE 零件公差		PART NAME 品名	DWG. 製圖	SCALE 比例	ANG. ±	2.0mm FEMALE HEADER DUAL ROW H:4.3mm W:4.6mm 2X??P STRAIGHT TYPE GOLD PLATING BLACK INSULATOR ROHS	DATE 制表日	UNIT 單位	SIZE. 紙張尺寸	A4	PART NO.	2012/9/3	M M	REV. 版次	B	C6801-XXBSGD00R	PAGE 張數		1 OF 1		料號	RoHS Compliant			HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
		APPD. 核准			TOLERANCE 零件公差		PART NAME 品名																							
DWG. 製圖	SCALE 比例	ANG. ±	2.0mm FEMALE HEADER DUAL ROW H:4.3mm W:4.6mm 2X??P STRAIGHT TYPE GOLD PLATING BLACK INSULATOR ROHS																											
DATE 制表日	UNIT 單位	SIZE. 紙張尺寸	A4	PART NO.																										
2012/9/3	M M	REV. 版次	B		C6801-XXBSGD00R																									
PAGE 張數		1 OF 1		料號																										
Helen		ANG. ±		PART NO. C6801-XXBSGD00R																										
2012/9/3		1 OF 1		料號																										